

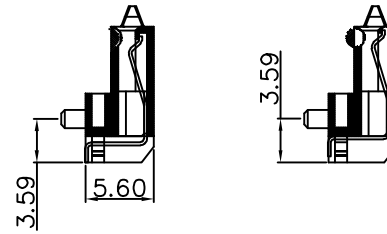
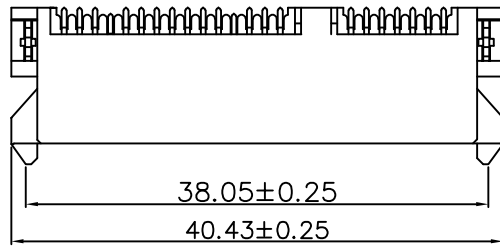


REV.	ECN NO.	MODIFY MATTER	DATE	APPROVED
A		RELEASE TO PRODUCTION		

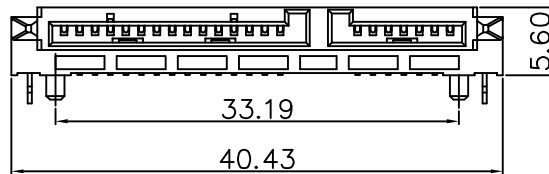



SPECIFICATION:
1. MATERIAL:
 HOUSING: LCP E130I 30% G/F UL 94V-0
 COLOR: BLACK
 CONTACT: PHOSPHOR BRONZE C519I H,T=0.25mm
 PEG: BRASS C2680R H,T=0.30mm
2. FINISH:
 CONTACT: 1u" GOLD/TIN PLATING ON CONTACT AREA
 100u" MIN. TIN-LEAD PLATING ON SOLDER TAILS
 50u" MIN. NICKEL UNDERPLATING OVER ALL
 PEG: 100u" MIN. TIN-LEAD PLATING ON SOLDER TAILS
 50u" MIN. NICKEL UNDERPLATING OVER ALL

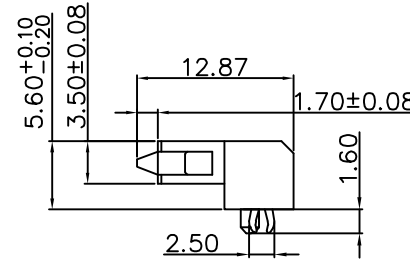


EAST-SA90SDS56LUCR

90: 卧式
 18: 直立
 SD: SMT
 DP: DIP
 P=公
 S=母
 高度
 H: 9.1mm
 P: PBT
 A: PA66
 L: LCP

包装
 A=Tube,
 B=Reel,
 C=Tray
 U=上接触
 D=下接触

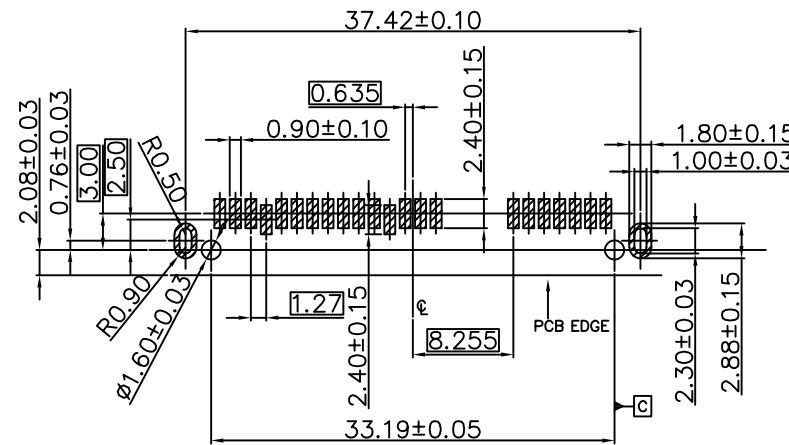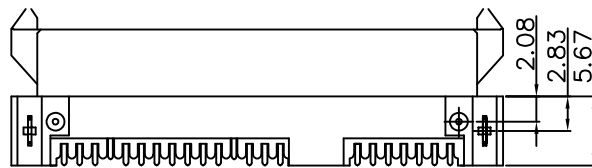

RECOMMEND PCB LAYOUT (T=1.2)
 PCB TOLERANCE: ±0.05

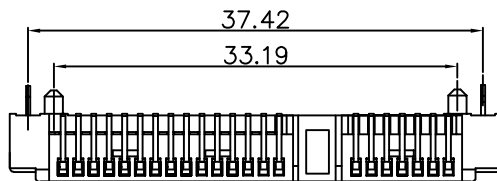

TOLERANCES UNLESS OTHERWISE SPECIFIED: X. --- X. X ± 0.38 X. XX ± 0.25 X. XXX ± 0.10 Angle ± 1°	COSTOMER COPY		深圳市东方御业科技有限公司 WWW.DFYCONN.COM TEL:0755-27155560			
	DRAWN: CHENLEI	2017/09/10	TITIAL: SATA 7+15P 二合一母座 SMT H: 5.6上接触 (RoHS)			
	CHECKED: CHENLEI	2017/09/10	PART NO: EAST-SA90SDS56LUCR			
	APPROVED: QINKAIXING	2017/09/10	UNIT: mm	SCALE: N/A	SHEET: 1:1	REV.

THESE DRAWING AND SPECIFICATION ARE THE PROPERTY OF Shenzhen Dongfangyue ELECTRONIC CO., LTD.. SHALL NOT BE REPRODUCED.