





| REV. | ECN NO. | MODIFY MATTER | DATE | APPROVED |
|------|---------|-----------------------|------|----------|
| A | | RELEASE TO PRODUCTION | | |

一、 MATERIAL:

1. Insulator: PBT+30% Glass Fiber (UL94V-0)
2. Contact: Brass
3. Contact Plated: Glod Flash over Tin Or Glod Plated Or Tin Plated
4. Shell: Stell, Nickel Plated

二、 SPECIFICATION:

1. Current Rating: 5 AMPS
2. Insulation Resistance: 1000MΩ MIN. At 500VDC
3. Dielectric Strength: 500V for One minute
4. Operation Temperature: -55° C ~ +105° C.

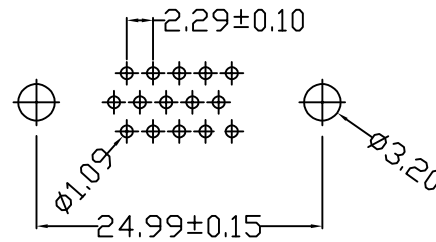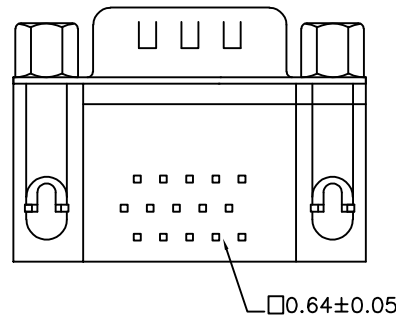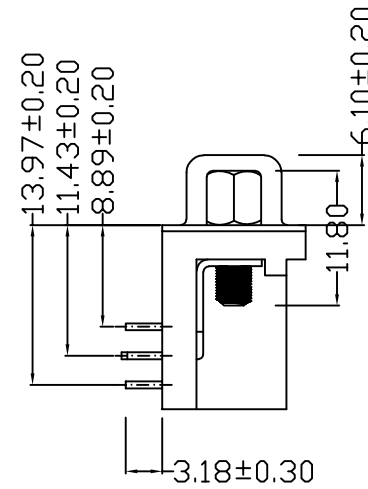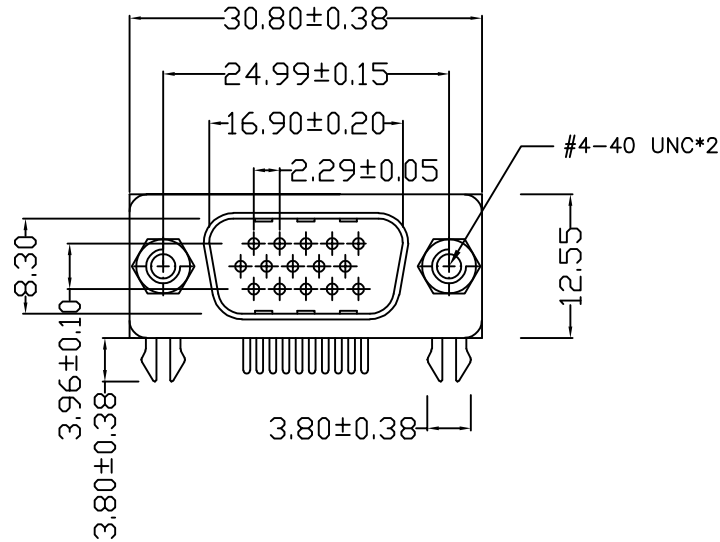

EAST-HDF15P-8.89XX-X

Pin 数:
 15:15P
 26:26P
 44:44P
 62:62P

BK:黑色
 BE:蓝色

- 1: 锁螺丝 4.8*11.8
- 2: 无螺丝
- 3: 附螺丝 4.8*11.8
- 4: 锁螺丝 5.8*11.8
- 5: 附螺丝 5.8*11.8

| | | |
|---|--|----------------------------------|
| TOLERANCES UNLESS OTHERWISE SPECIFIED: X. --- X. X ± 0.38 X. XX ± 0.25 X. XXX ± 0.20 Angle ± 3° | CUSTOMER COPY 深圳市东方御业科技有限公司 Tel:0755-2715560 WWW.DFYCONN.COM | |
| | DRAWN: Qinkx | 2017/09/10 |
| CHECKED: Chenl | 2017/09/10 | PART NO: EAST-HDF15P-8.89XX-X |
| APPROVED: Chenl | 2017/09/10 | UNIT: mm |
| THESE DRAWING AND SPECIFICATION ARE THE PROPERTY OF Shenzhen Dongfangyue ELECTRONIC CO., LTD.. SHALL NOT BE REPRODUCED. | SCALE: N/A | SHEET: REV. |