

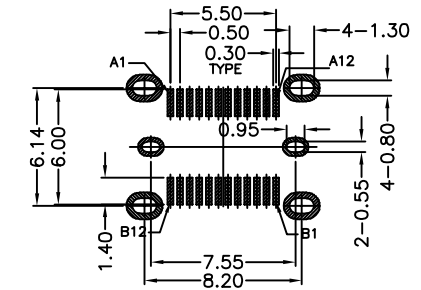

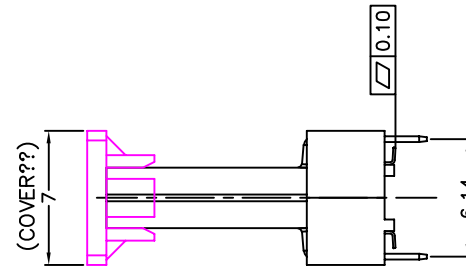

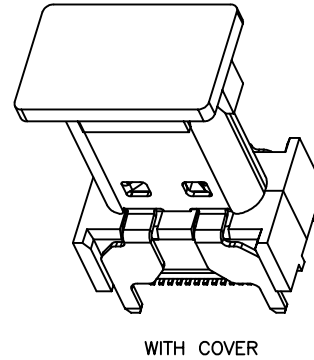
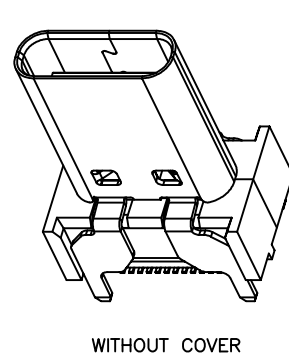
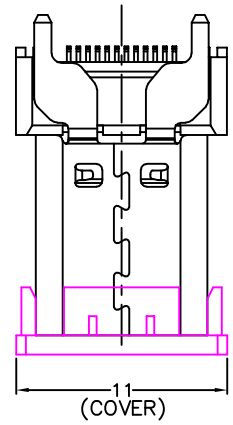


REV.	ECN NO.	MODIFY MATTER	DATE	APPROVED
A		RELEASE TO PRODUCTION		

- Contact Resistance: 40mOHM Max.;
- Dielectric Withstanding Voltage: 100V AC For 1 Minute;
- Insulation Resistance: 100M OHM Min.;
- Mating And Unmating Force:
Mating Force: 5~20N
Unmating Force: 8~20N;
6~20N AFTER TEST ;
- Durability: 10000 Cycles;

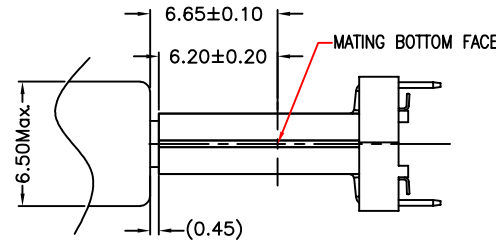

RECOMMEND P.C.B LAYOUT (COMPONENT SIDE)
TOLERANCE FOR PCB LAYOUT IS ± 0.05
KEEP OUT AREA

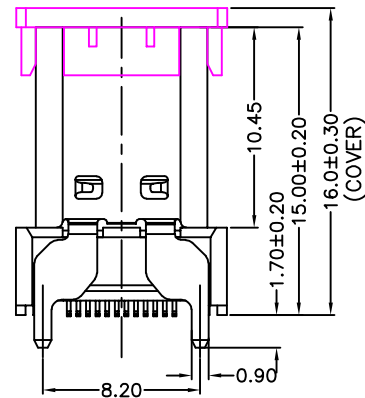

Item	Title	Material	Dispose	Remark
1	Shell	Stainless Steel	Ni30u ⁺ Min.	
2	GND Plate	Stainless Steel		
3	Mid Plate	Stainless Steel		
4	Top Contact	Copper Alloy	Mating Area: See P/N	
5	Bottom Contact	Copper Alloy	Solder Tails: Matt. Tin	
6	Insulator	High Temperature Plastic	UL 94V-0	Black

TOLERANCES UNLESS OTHERWISE SPECIFIED:
X. ---
X.X ± 0.38
X.XX ± 0.25
X.XXX ± 0.20
Angle ± 3°

CUSTOMER COPY

深圳市东方御业科技有限公司
WWW.DFYCONN.COM TEL: 0755-27155560

DRAWN: Qinx
CHECKED: Chenl

DATE: 2017/09/10
DATE: 2017/09/10

TITLE: USB 3.1 TYPE C 母座
直立式 H15.0mm SMT
PART NO: EAST-USF24DH15XX-R (RoHS)

THESE DRAWING AND SPECIFICATION ARE THE PROPERTY OF Shenzhen Dongfangyue ELECTRONIC CO., LTD. SHALL NOT BE REPRODUCED.

APPROVED: Chenl

DATE: 2017/09/10

UNIT: mm
SCALE: N/A
SHEET: 1
REV.

DO NOT SCALE PRINT