

REV.	ECN NO.	MODIFY MATTER	DATE	APPROVED
A		RELEASE TO PRODUCTION	2017/09/10	Mike

SPECIFICATIONS

ELECTRICAL CHARACTERISTICS:

Contact Current Rating: 3 Amperes.
 Dielectric Withstanding Voltage: AC 1000/60sec.r.m.s.
 Insulation Resistance: 5000 Medohms Minimum.at DC 500V.
 Contact Resistance: 25 Milliohms Maximum.
 Operating Temperature: -55°C to +105°C.

MECHANICAL CHARACTERISTICS:





Contact Insertion Force: 341 g.Maximum.
 Contact Separation Force: 21 g.Minimum.

MATERIALS:

Contacts: Brass.
 Insulator: NTLON 9T UL 94V-0 Rated.
 Shell: Cold Roller Steel.


FINISHES:

Contact: Gold Flash.
 Shell: Nickel Plated.

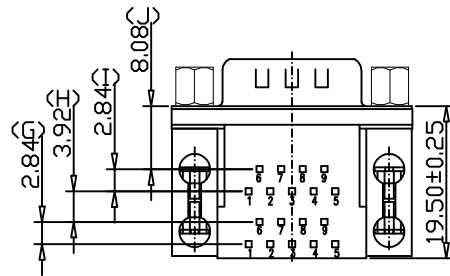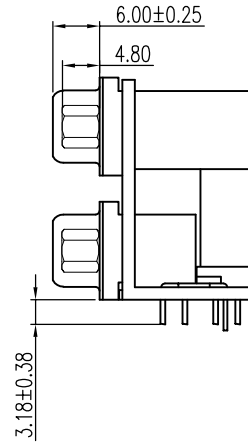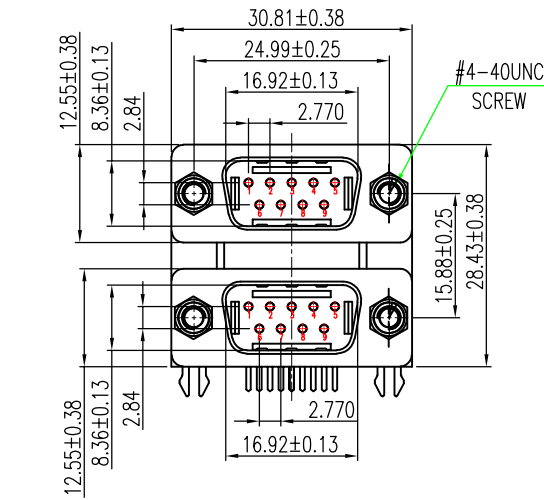

EAST-A112AP2A1XX

- 中心高 ————
 A: 15.88mm
 B: 19.05mm
 螺丝: ————
 1: 无螺丝
 A: 锁螺丝 4.8*11.8
 B: 附螺丝 4.8*11.8
 E: 锁螺丝 5.8*11.8
 F: 附螺丝 5.8*11.8
- 塑胶颜色:
 1: 黑色
 2: 绿色
 C: 上绿下黑
 F: 上黑下绿

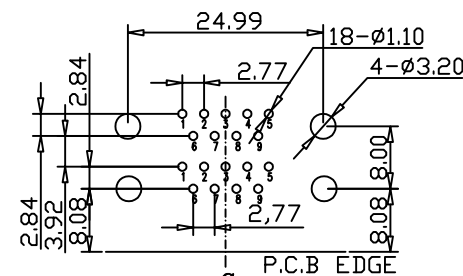


RECOMMENDED P.C.B LAYOUT

INSPECTION DIMENSION:(A)~(J)

TOLERANCES UNLESS OTHERWISE SPECIFIED: X. --- X.X ± 0.38 X.XX ± 0.25 X.XXX ± 0.20 Angle ± 3°	COSTOMER COPY 深圳市东方御业科技有限公司 WWW.DFYCONN.COM TEL:0755-27155560	
	DRAWN: Qinx 2017/09/10	TITL: D-SUB CONNECTOR 9 MALE/9 MALE DUAL PORT (RoHS)
	CHECKED: Chenl 2017/09/10	PART NO: EAST-A112AP2A1XX
	APPROVED: Chenl 2017/09/10	UNIT: mm SCALE: N/A SHEEL: 1/1 REV. A

REV.	ECN NO.	MODIFY MATTER	DATE	APPROVED
A		RELEASE TO PRODUCTION	2018/01/20	Mike

包裝圖

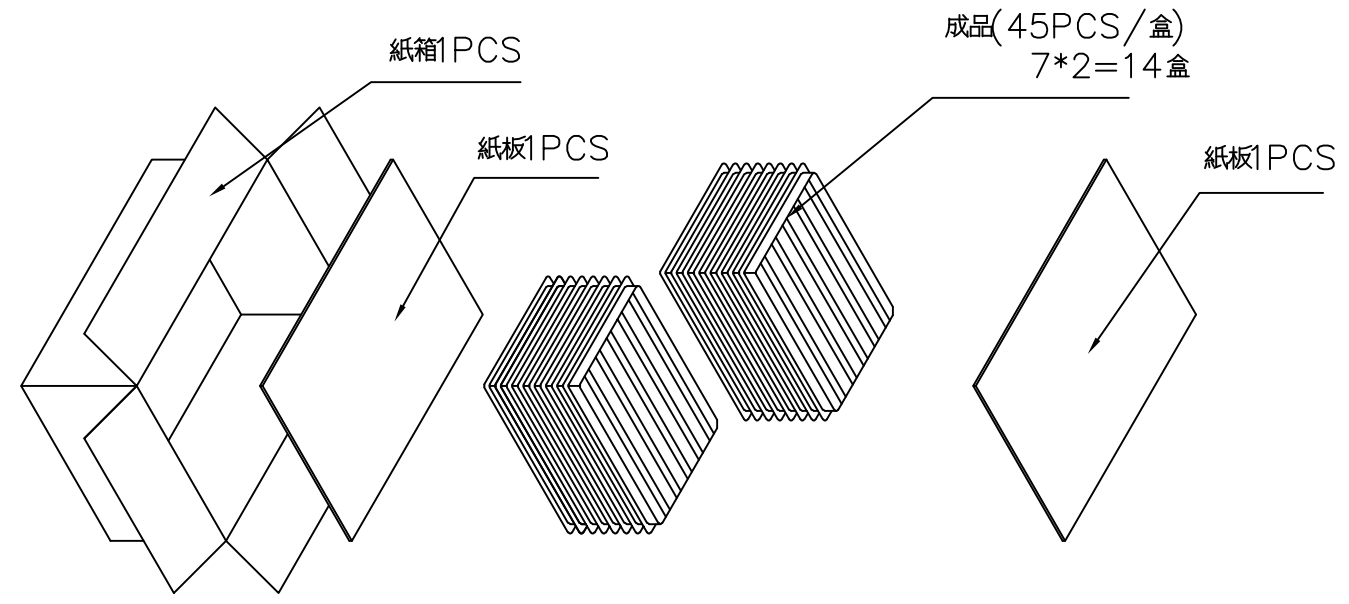

加厚紙箱: 45*31*22.5CM

EAST-A112AP2A1XX	X.XX	X.XX	45*14=630
料 號	N.W:(KG)	G.W:(KG)	QT'Y(PCS)

TOLERANCES UNLESS OTHERWISE SPECIFIED: X. --- X.X ± 0.38 X.XX ± 0.25 X.XXX ± 0.20 Angle ± 3°	CUSTOMER COPY	深圳市东方御业科技有限公司 WWW.DFYCONN.COM TEL:0755-27155560		
	DRAWN: Qinkx	2018/01/20	TITIAL: D-SUB 双层系列包装图	
THESE DRAWING AND SPECIFICATION ARE THE PROPERTY OF Shenzhen Dongfangyuye ELECTRONIC CO., LTD. SHALL NOT BE REPRODUCED.	CHECKED: Chenl	2018/01/20	PART NO: EAST-A112AP2A1XX	
	APPROVED: Chenl	2018/01/20	UNIT: mm	SCALE: N/A SHEEL: 1/1 REV. A

www.dfyconn.com