


REV.	ECN NO.	MODIFY MATTER	DATE	APPROVED
A		RELEASE TO PRODUCTION	2008/02/05	Mike


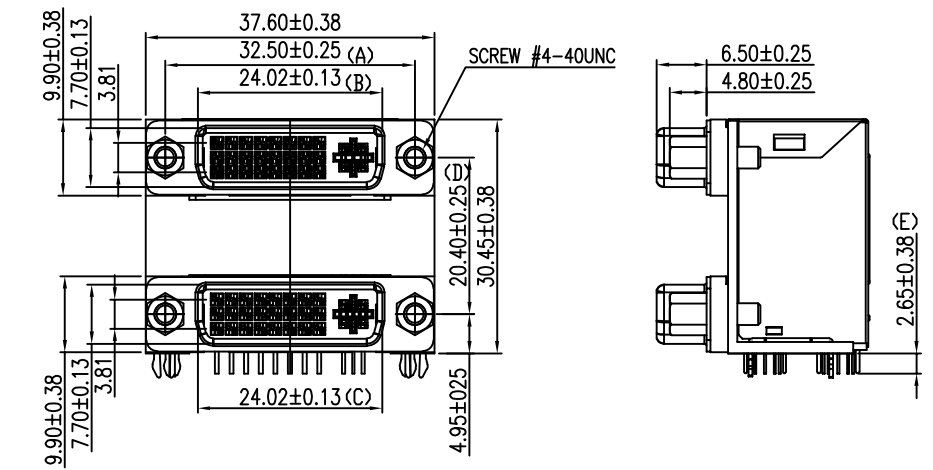


SPECIFICATIONS

- DVI
 - Voltage: 40 VAC(RMS) Max.
 - Current Rating: 1.5 Ampere per Contact
 - Contact Resistance(UPPER): 30 Milliohms Max.
Contact Resistance(LOWER): 20 Milliohms Max.
 - Insulation Resistance: 1000 Megohms Min.
 - Dielectric Withstanding Voltage: 500V DC(RMS)
 - Total Mating Force: 4.5 Kgf Max.
 - Total Unmating Force: 1.0 Kgf Min.
 - Operating Temperature: -55°C to +85°C


NOTES

- MATERIAL:**
 - Housing(UPPER):PBT, UL 94V-0, Color:Ivory.
 - Housing(LOWER):PBT, UL 94V-0, Color:Ivory.
 - Terminal:Copper Alloy.
 - Shell:SPCC.
 - Shield:Stainless Steel.
 - Boardlock:Copper Alloy.
 - Bracket:Zinc Alloy.
 - Screw:Copper Alloy.
- FINISH:**
 - Terminal:Gold Plated over Nickel at Contact Area.
 - Tin Plated over Nickel at Solder Area.
 - Shell:Nickel Plated.
 - Boardlock:Tin Plated.
 - Bracket:Nickel Plated.
 - Screw:Nickel Plated.
- This Product is LEAD-FREE & RoHS Compliance Product.

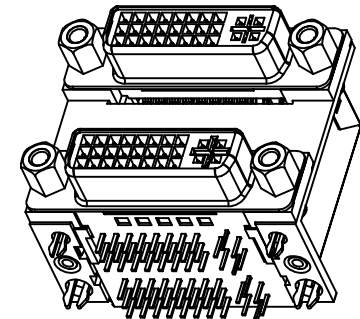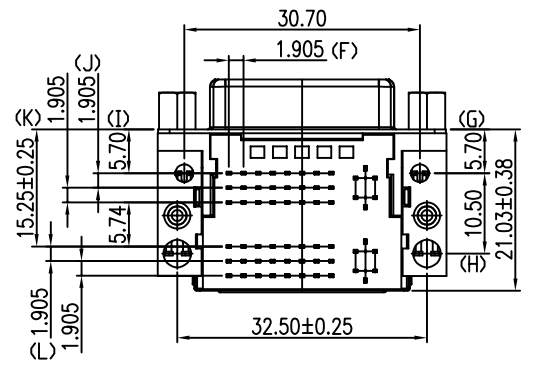

EAST-DVIV4V4CAX2R

- 上层: V4:DVI-I 24+5P
- 下层: V4:DVI-I 24+5P
- 中心高: C:20.40mm
- 螺丝: 1:无螺丝
A:锁螺丝4.8*11.8
B:附螺丝4.8*11.8
E:锁螺丝5.8*11.8
F:附螺丝5.8*11.8
- 环保要求: R:ROHS
- 塑胶材质: 1:PBT
2:LCP
4:上层PBT, 下层LCP
- 塑胶颜色: 1:黑色
4:白色
C:上层黑色, 下层白色
F:上层白色, 下层黑色

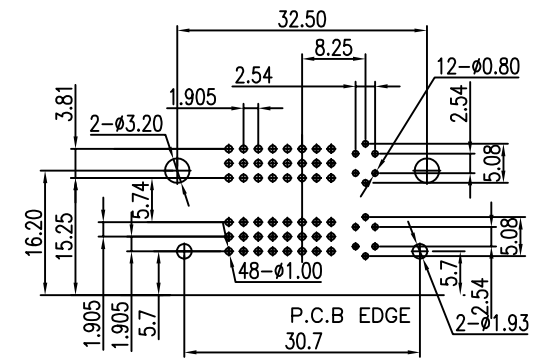

RECOMMENDED P.C.B. LAYOUT


INSPECTION DIMENSION:(A)~(L)

TOLERANCES UNLESS OTHERWISE SPECIFIED: X. --- X.X ± 0.38 X.XX ± 0.25 X.XXX ± 0.20 Angle ± 3°	INSPECTION COPY	深圳市东方御业科技有限公司 Tel:0755-27155560 www.DFYCONN.COM	
	DRAWN: Li yu	2008/02/05	TITL: DVI-I / DVI-I FEMALE RIGHT ANGLE
THESE DRAWING AND SPECIFICATION ARE THE PROPERTY OF Shenzhen Dongfangyuye CO.,LTD. SHALL NOT BE REPRODUCED.	CHECKED: Mike	2008/02/05	PART NO: EAST-DVIV4V4CAX2R
	APPROVED: Mike	2008/02/05	DRAWING NO: (RoHS)
UNIT: mm	SCALE: N/A	SHEET: 1/1	REV: A

DO NOT SCALE PRINT

REV.	ECN NO.	MODIFY MATTER	DATE	APPROVED
A		RELEASE TO PRODUCTION	2018/01/20	Mike

包裝圖

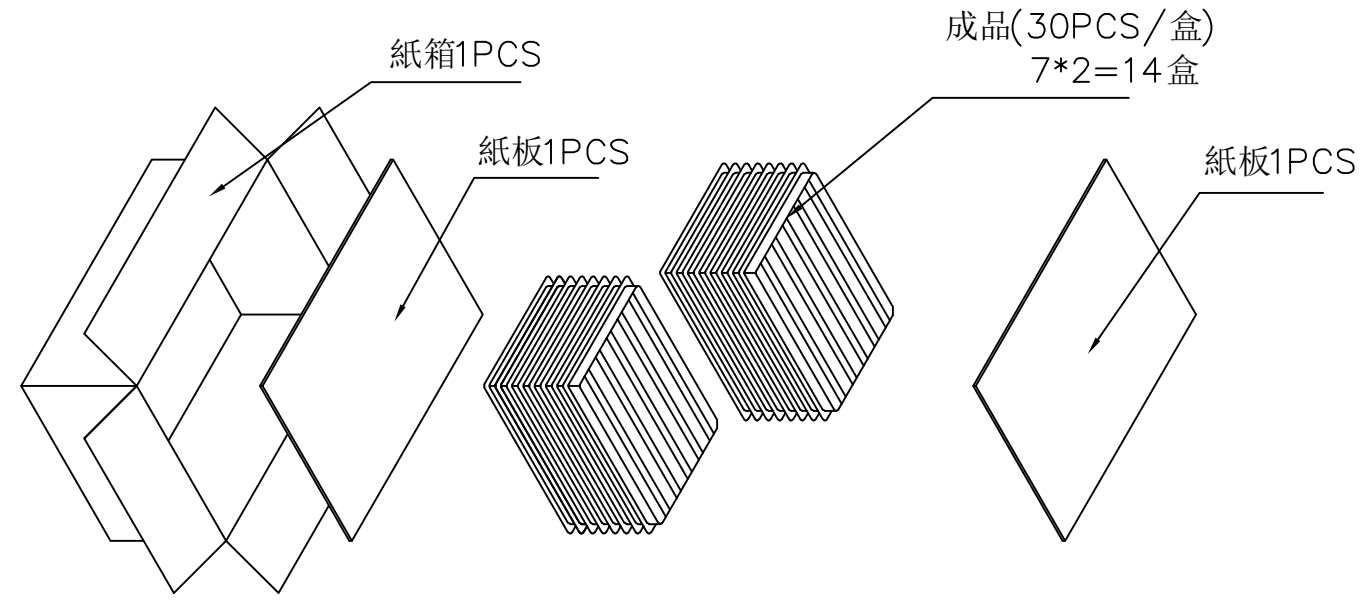

加厚紙箱: 45*31*22.5CM

EAST-DVIV4V4CAX2R	X.XX	X.XX	30*14=420
料 號	N.W: (KG)	G.W: (KG)	QT'Y(PCS)

TOLERANCES UNLESS OTHERWISE SPECIFIED: X. --- X.X ± 0.38 X.XX ± 0.25 X.XXX ± 0.20 Angle ± 3°	CUSTOMER COPY	深圳市东方御业科技有限公司 WWW.DFYCONN.COM TEL:0755-27155560		
	DRAWN: Qinkx	2018/01/20	TITIAL: D-SUB 双层系列包装图	
THESE DRAWING AND SPECIFICATION ARE THE PROPERTY OF Shenzhen dongfangyue ELECTRONIC CO., LTD., SHALL NOT BE REPRODUCED.	CHECKED: Chenl	2018/01/20	PART NO: EAST-DVIV4V4CAX2R	
	APPROVED: Chenl	2018/01/20	UNIT: mm	SCALE: N/A SHEEL: 1/1 REV. A

www.dfyconn.com