





REV.	ECN NO.	MODIFY MATTER	DATE	APPROVED
A		RELEASE TO PRODUCTION	2017/09/10	Mike
		料号描述	2023/10/24	Chenlei

SPECIFICATIONS

- VGA
 - Voltage: 250 VAC(RMS) Max.
 - Current Rating: 3 Ampere per Contact
 - Contact Resistance: 25 Milliohms Max.
 - Insulation Resistance: 5000 Megohms Min.
 - Dielectric Withstanding Voltage: 1000V AC(RMS)
 - Total Mating Force: 6.0 Kgf Max.
 - Total Unmating Force: 1.2 Kgf Min.
 - Operating Temperature: -55°C to +85°C
- DVI
 - Voltage: 40 VAC(RMS) Max.
 - Current Rating: 1.5 Ampere per Contact
 - Contact Resistance: 20 Milliohms Max.
 - Insulation Resistance: 1000 Megohms Min.
 - Dielectric Withstanding Voltage: 500V DC(RMS)
 - Total Mating Force: 4.5 Kgf Max.
 - Total Unmating Force: 1.0 Kgf Min.
 - Operating Temperature: -55°C to +85°C

NOTES

- MATERIAL:
 - Housing(VGA):PBT, UL 94V-0, Color:Blue.
 - Housing(DVI):PBT, UL 94V-0, Color:Ivory.
 - Terminal:Copper Alloy.
 - Shell:SPCC.
 - Boardlock:Copper Alloy.
 - Bracket:Zinc Alloy.
 - Screw:Steel.
- FINISH:
 - Terminal:Gold Plated over Nickel at Contact Area.
Tin Plated over Nickel at Solder Area.
 - Shell:Nickel Plated.
 - Boardlock:Tin Plated.
 - Bracket:Nickel Plated.
 - Screw:Nickel Plated.
- This Product is LEAD-FREE & RoHS Compliance Product.

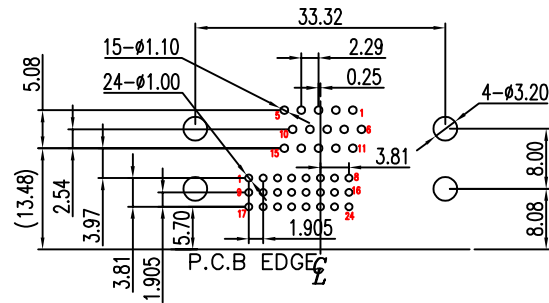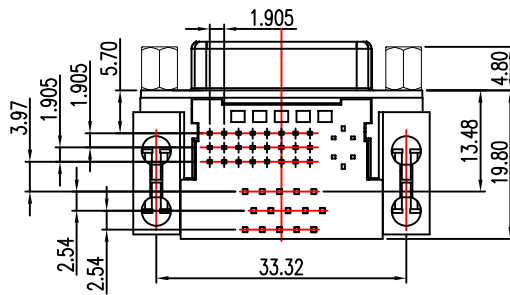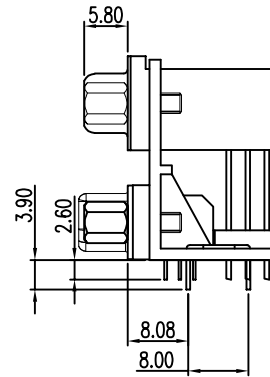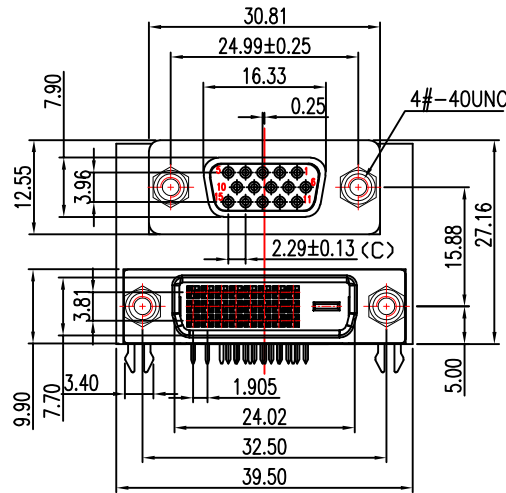

RECOMMENDED P.C.B LAYOUT

INSPECTION DIMENSION:(A)~(M)

EAST-6SV2XP2A1XX

中心高
A: 15.88mm
B: 19.05mm


塑胶颜色:
1: 黑色
C: 上层黑色, 下层白色
F: 上层蓝色, 下层白色
J: 上层绿色, 下层白色

螺丝:
1: 无螺丝
A: 附螺丝4.8*11.8
B: 锁螺丝4.8*11.8
E: 锁螺丝5.8*11.8
F: 附螺丝5.8*11.8

TOLERANCES UNLESS OTHERWISE SPECIFIED: X. --- X.X ± 0.38 X.XX ± 0.25 X.XXX ± 0.20 Angle ± 3°	COSTUMER COPY	深圳市东方御业科技有限公司 WWW.DFYCONN.COM TEL:0755-27155560	
	DRAWN: Qinx	2017/09/10	TITL: D-SUB HIGH DENSITY 15 FEMALE /DVI-D FEMALE RIGHT ANGLE (RoHS)
THESE DRAWING AND SPECIFICATION ARE THE PROPERTY OF ShenzhenDongfangyue ELECTRONIC CO., LTD.; SHALL NOT BE REPRODUCED.	CHECKED: Chenl	2017/09/10	PART NO: EAST-6SV2XP2A1XX
	APPROVED: Chenl	2017/09/10	UNIT: mm
			SCALE: N/A
			SHEET: 1/1
			REV: A

REV.	ECN NO.	MODIFY MATTER	DATE	APPROVED
A		RELEASE TO PRODUCTION	2018/01/20	Mike

包裝圖

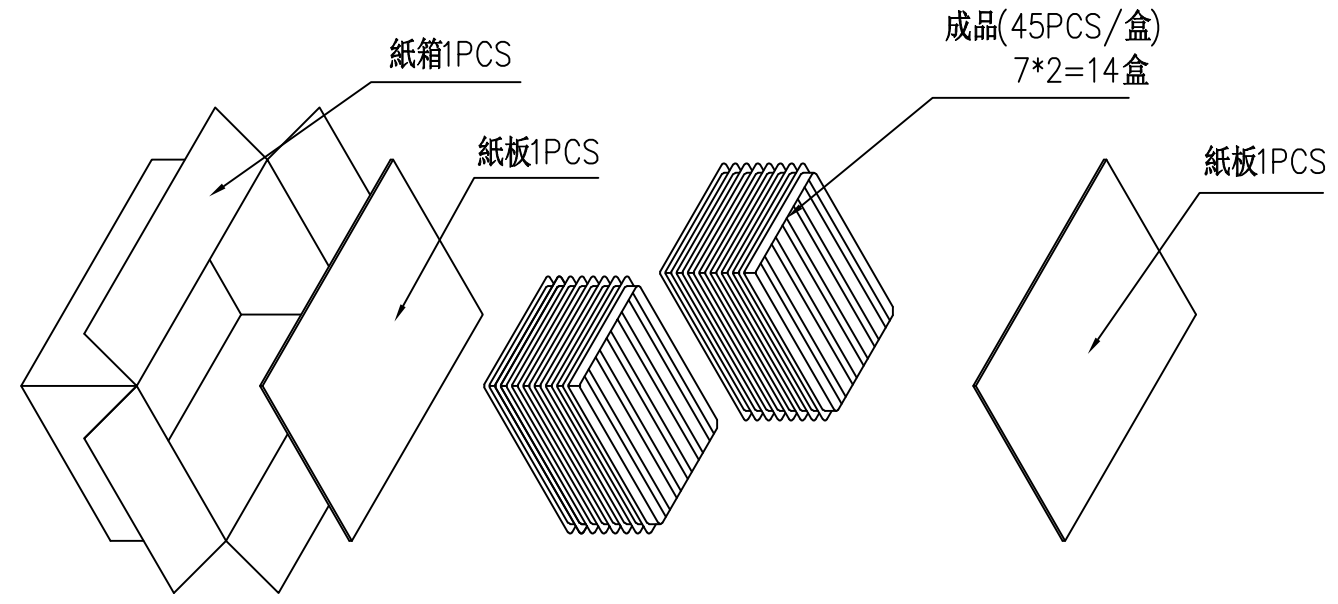

加厚紙箱: 45*31*22.5CM

	X.XX	X.XX	35*14=390
料 號	N.W:(KG)	G.W:(KG)	QT'Y(PCS)

TOLERANCES UNLESS OTHERWISE SPECIFIED: X. --- X.X ± 0.38 X.XX ± 0.25 X.XXX ± 0.20 Angle ± 3°	CUSTOMER COPY		深圳市东方御业科技有限公司 WWW.DFYCONN.COM TEL: 0755-27155560	
	DRAWN: Qinkx	2018/01/20	TITLE: D-SUB 双层系列包装图	
THESE DRAWING AND SPECIFICATION ARE THE PROPERTY OF Shenzhen Dongfangyue Electronic Co., Ltd. SHALL NOT BE REPRODUCED.	CHECKED: Chenl	2018/01/20	PART NO:	
	APPROVED: Chenl	2018/01/20	UNIT: mm	SCALE: N/A
			SHEET: 1/1	REV. A

www.dfyconn.com