

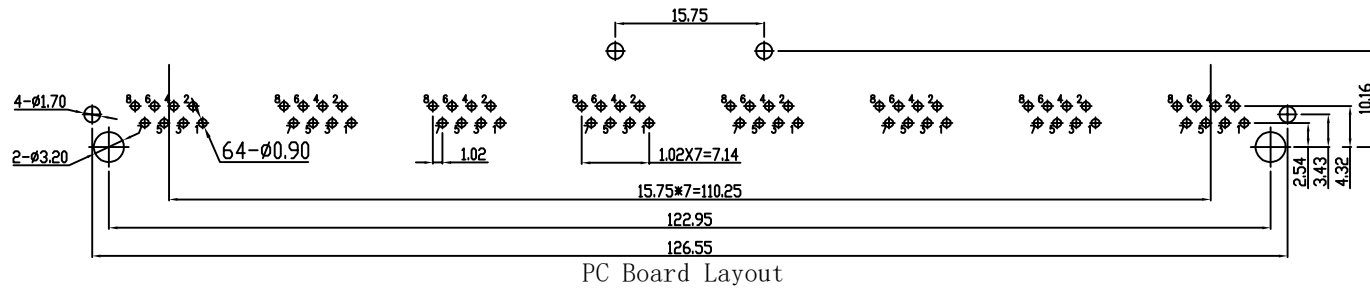
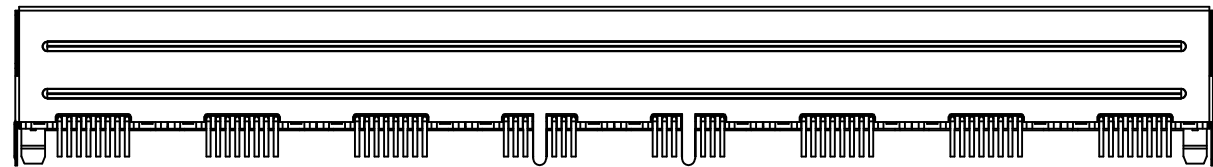
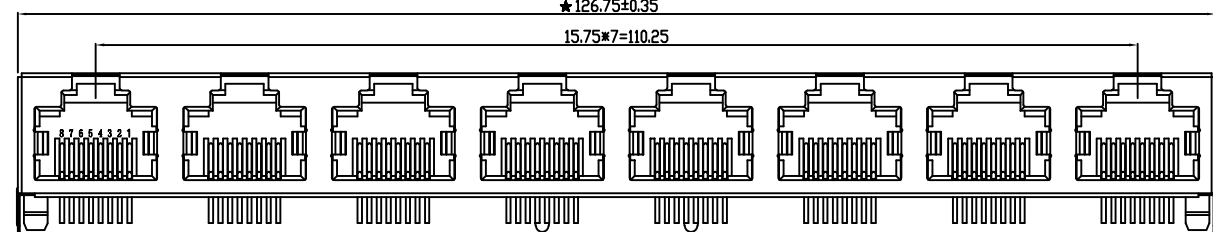


REV.	ECN NO.	MODIFY MATTER	DATE	APPROVED
A		RELEASE TO PRODUCTION		



- NOTES:
- ELECTRICAL:
1. VOLTAGE RATING: 125V AC.
 2. CURRENT RATING: 1.5A.
 3. CONTACT RESISTANCE: 30 mΩ MAX.
 4. INSULATION RESISTANCE: 500 MΩ MIN @ 500V DC.
 5. DIELECTRIC STRENGTH: 1000V AC 50Hz or 60Hz, 1MIN.
- MECHANICAL:
1. INSERT MATERIAL: UL94V-0.
 2. CONTACT MATERIAL: DIAMETER 0.46mm C51000(QSn4-0.3) PHOSPHOR BRONZE GOLD PLATING OVER NICKEL.
 3. SHIELD: 0.20mm THICKNESS H65Y BRASS NICKEL PLATED.
 4. MATING/UNMATING FORCE: 2.2KG.F MAX.
 5. RETENTION STRENGTH: 5.0KG.F MIN BETWEEN JACK AND PLUG.
 6. OPERATING LIFE: 750 CYCLES MIN.
- ENVIRONMENTAL:
1. STORAGE: -40°C ~ +85°C RELATIVE HUMIDITY<70%.
 2. OPERATION: -40°C ~ +85°C.
- Remark:
1. The mark with★ is the key inspection dimension for QC.

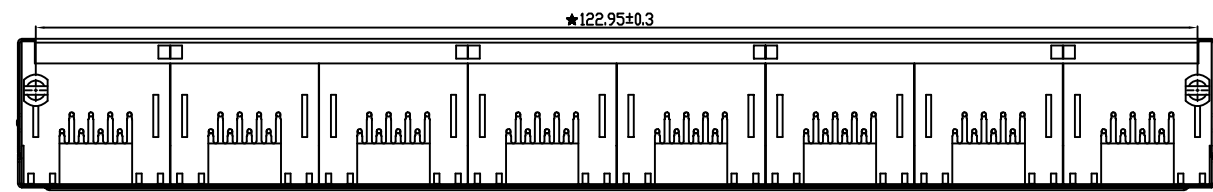

A向视图

EAST-56A-38880211101

- CONTACTS (金针根数): _____
- 8-8CONTACTS (8C)
- BACK PEG (后脚铁脚): _____
- 2-2BACK PEG (2个后背铁脚)
- EMI (弹片): _____
- 1-W/O EMI (无弹片); 2-W/EMI (带弹片)
- PLASTIC (塑料): _____
- 1-PBT; 2-NYLON66 (尼龙66);
- 3-NYLON46 (尼龙46)
- COLOR (颜色): _____
- 1-BLACK (黑色); 3-GRAY (灰色); 5-YELLOE (黄色);
- 6-RED (红色); 7-GREEN (绿色); 8-BLUE (蓝色)
- GOLD PLATING (镀金厚度): _____
- 1-FU"; 2-1.5U"; 3-3U"; 4-6U";
- 5-15U"; 6-30U"; 7-50U"

TOLERANCES UNLESS OTHERWISE SPECIFIED: X. --- X.X ± 0.38 X.XX ± 0.25 X.XXX ± 0.10 Angle ± 1°		COSTOMER COPY		深圳市东方御业科技有限公司 WWW.DFYICDN.COM TEL:0755-27155560	
DRAWN: CHENLEI		2017/09/10		TITL: 56S 1X8 8P8C	
CHECKED: CHENLEI		2017/09/10		PART NO: EAST-56A-38880211101	
APPROVED: QINKAIXING		2017/09/10		UNIT: mm	SCALE: N/A
THESE DRAWING AND SPECIFICATION ARE THE PROPERTY OF Shenzhen Dongfangyue ELECTRONIC CO., LTD., SHALL NOT BE REPRODUCED.				SHEET: 1:1	REV.

UNIT: mm SCALE: N/A SHEET: 1:1 REV.