

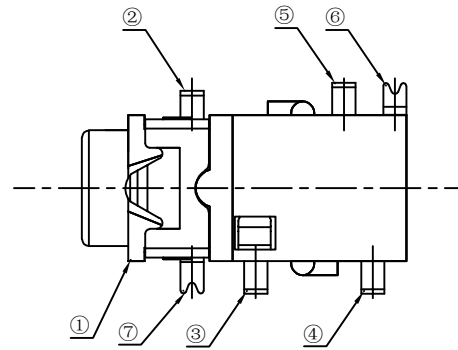
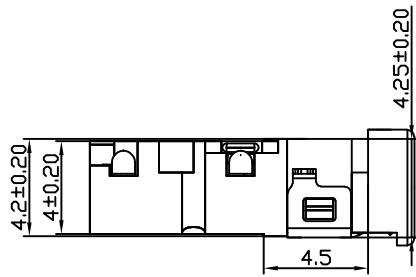
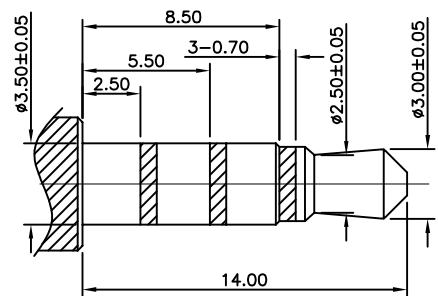
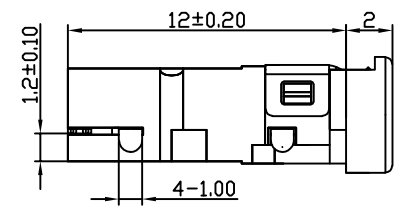
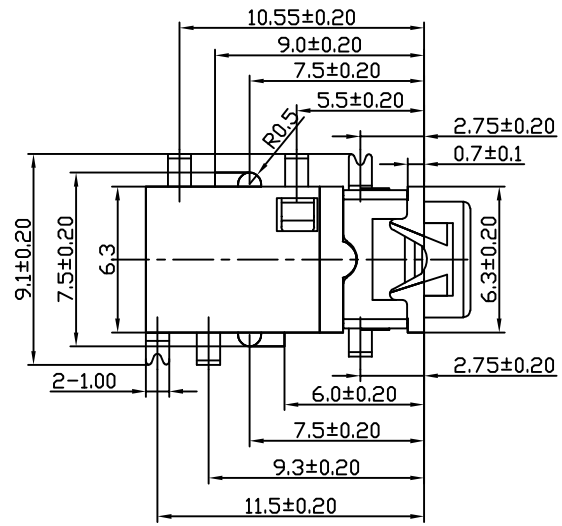



| REV. | ECN NO. | MODIFY MATTER | DATE | APPROVED |
|------|---------|-----------------------|------|----------|
| A | | RELEASE TO PRODUCTION | | |



- NOTES:
- CONTACT CURRENT RATING: 1A.
 - CONTACT RESISTANCE: 50 mΩ MAX.;
 - INSULATION RESISTANCE: 1000Ω MIN.;
 - DIELECTRIC WITHSTANDING: 500V AC MIN.;
 - DURABILITY: 5,000 CYCLES MIN.;
 - CONNECTOR MATING FORCES: 30N MAX.;
 - CONNECTOR UNMATING FORCES: 3N MIN.;



(Ø3.50mm 4 POLE PLUG DETAIL DRAWING)

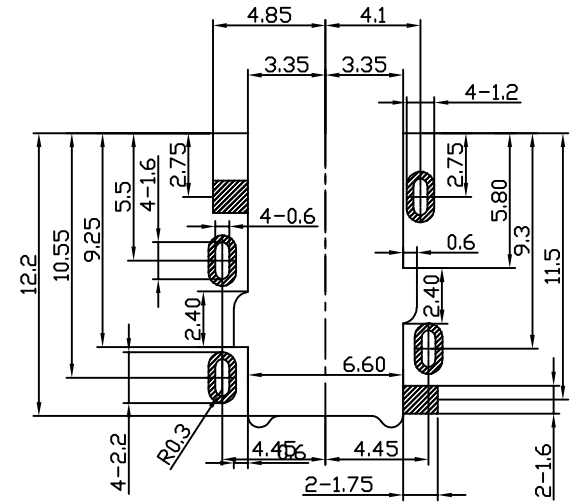

RECOMMENDED PCB LAYOUT

EAST-2308G-06FB-APA

B:BLACK
 P:PINK
 G:GREEN

| | | | | | |
|----------------------------------------------------------------------------------------------------------|--|---------------|--|-----------------------------------------------------|------------|
| TOLERANCES UNLESS OTHERWISE SPECIFIED: X. — X.X ± 0.38 X.XX ± 0.25 X.XXX ± 0.10 Angle ±1° | | CUSTOMER COPY | | 深圳市东方御业科技有限公司 WWW.DFYCONDN.COM TEL:0755-27155560 | |
| DRAWN: CHENLEI | | 2017/09/10 | | TITL: Ø3.5mm PHON JACK | |
| CHECKED: CHENLEI | | 2017/09/10 | | PART NO: EAST-2308G-06FB-APA | |
| APPROVED: QINKAIXING | | 2017/09/10 | | UNIT: mm | SCALE: N/A |
| | | | | SHEET: 1:1 | REV. |

THESE DRAWING AND SPECIFICATION ARE THE PROPERTY OF Shenzhen Dongfangyue ELECTRONIC CO., LTD.. SHALL NOT BE REPRODUCED.

(RoHS)