



NOTES:

- 1.MATERIAL:
 - 1.1 HOUSING: PA66,UL 94V-2,COLOR:(SEE TABLE)
 - 1.2 CONTACT: Brass, C2680 H
- 2.FINISH:
 - 2.1 CONTACT: 80u" Min. BRIGHT TIN PLATING, OVER 30U" MIN NICKEL.
- 3.SPECIFICATION:
 - 3.1 Current rating: 8A Max.
 - 3.2 Contact Resistance: 30mΩ Max.
 - 3.3 Insulation Resistance: 1000MΩ Min.
 - 3.4 Operation trmperature: -40°C to +105°C

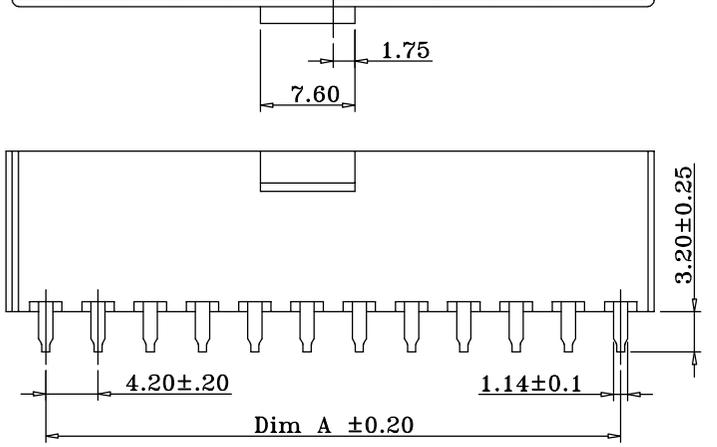

***ORDER INFORMATION*:**

EAST-XXX 03 X 01 XX X X

No. of Pins

- 004 -> 4P
- 008 -> 8P
- 024 -> 24P
-

Enviroment Protection:

- R for RoHS
- G for GP
- H for Halogen-free

Packing:

C-Tray, D-Pe bag, E-Box

Plating:

A- Flash.Gold in contact area/
80u" Min Tin in solder area.



I- Tin Plated

Color:

Ax:Red, Bx:Orange,Cx:Yellow
Dx:Green, Fx:Blue, Gx:Purple,
Kx:Black, Lx:White,
Jx:Transparent color

RECOMMENDED P.C.B OARD LAYOUT (T=1.6MM)
PCB TOLERANCE:±0.05

46.20	51.60	24
42.00	47.40	22
37.80	43.20	20
33.60	39.00	18
29.40	34.80	16
25.20	30.60	14
21.00	26.40	12
16.80	22.20	10
12.60	18.00	8
8.40	13.80	6
4.20	9.60	4
	5.80	2
A	B	POS.
DIMENSION		

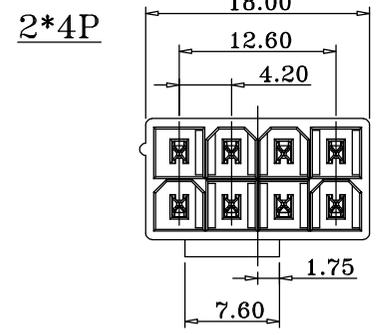

A
B
C
D
E

A
B
C
D
E

TOLERANCE		深圳市东方御业科技有限公司 Tel:0755-27155560 https://dfyyconn.1688.com	TITLE: 4.20mm Pitch ATX Vertical DIP type	
LINEAR	ANGLES		PART NO.:	SEE TABLE
X.±0.50	X'.±2.0'	DWG NO.:	EAST-XXX03-01	
.X±0.38	.X'±1.0'	UNITS	MM	
.XX±0.25	.XX'±	SCALE	1:1	
.XXX±0.15	.XXX'±	SHEET	1 OF 1	
APPD:	DRWN: Rocky	REV	A/0	
CHKD:	DATE: 2014-3-28			