


P.C.B LAYOUT
TOP VIEW

EAST-2327F-06DX-PPA

- B:BLACK
- P:PINK(#199C)
- G:GREEN(#577C)

- SPECIFICATION**
1. Rating : DC 30V 0.5A;
 2. Contact resistance: $\leq 0.03\Omega$;
 3. Insulation resistance: $\geq 100M\Omega$ (DC250V) ;
 4. Withstand voltage: 500VAC ;
 5. Insertion and extraction force: 3-30N;
 6. Life test: 5,000 cycles.

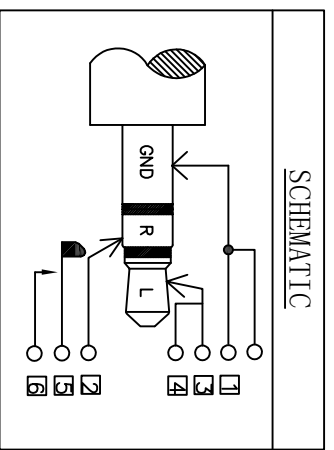

NO.	DESCRIPTION	QTY	MATERIAL	PLATING
8	SHELL	1	SUS 301	
7	HOUSING	1	UL-94V0	
6	CONTACT FOOT	1	PHOSPHOR BRONZE	Sn-Plating
5	SPRING PIECE	1	PHOSPHOR BRONZE	Sn-Plating
4	CURVE PIECE	1	PHOSPHOR BRONZE	Sn-Plating
3	SPRING PIECE	1	PHOSPHOR BRONZE	Sn-Plating
2	SPRING PIECE	1	PHOSPHOR BRONZE	Sn-Plating
1	CONTACT FOOT	1	PHOSPHOR BRONZE	Sn-Plating

深州市东方御业科技有限公司
 WWW.DFYCO.COM TEL:0755-27155560

AUDIO JACK (R49S)

EAST-2327F-06DX-PPA

DATE: 2017/09/10

SCALE: N/A

SHEET: 1/1

REV:

APPROVED:

RELEASE TO PRODUCTION

DATE:

APPROVED:

TOLERANCES UNLESS OTHERWISE SPECIFIED:

X	± 0.38
X.X	± 0.25
X.XX	± 0.10
Angle	± 1°

THESE DRAWING AND SPECIFICATION ARE THE PROPERTY OF Shenzhen Dongfangyue Technology Co., Ltd. NOT BE REPRODUCED.

DRAWN:	CHEWELI	2017/09/10
CHECKED:	CHEWELI	2017/09/10
APPROVED:	QINMAXING	2017/09/10

PART NO:	EAST-2327F-06DX-PPA
SCALE:	N/A
SHEET:	1/1
REV:	