





REV.	ECN NO.	MODIFY MATTER	DATE	APPROVED
A		RELEASE TO PRODUCTION		

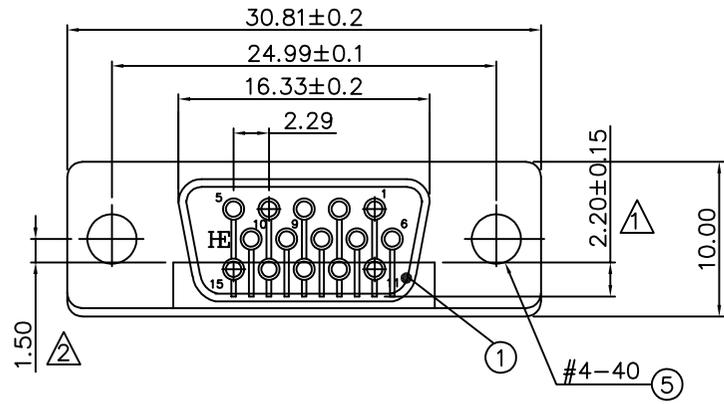

Recommended P.C.B Layout (component side)

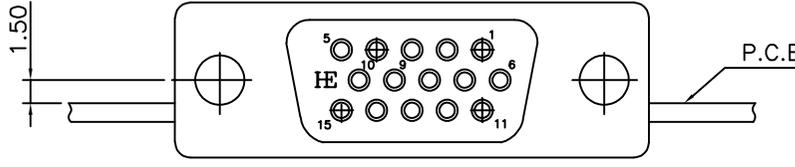


规格:  
 接触阻抗:30milliohms MAX  
 耐电压:500V AC  
 绝缘阻抗:1000 MEGAohms MIN  
 寿命:5000次, 插拔速度300次/小时  
 插拔力: 插入力MAX:4.5Kgf Max.  
           拔出力MIN:0.45Kgf Min.  
 工作温度:-30°C~+85°C  
 盐雾测试: 24H

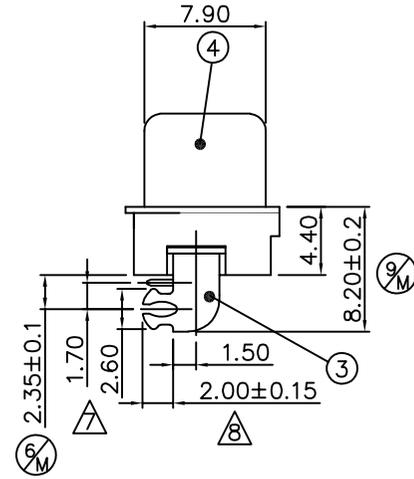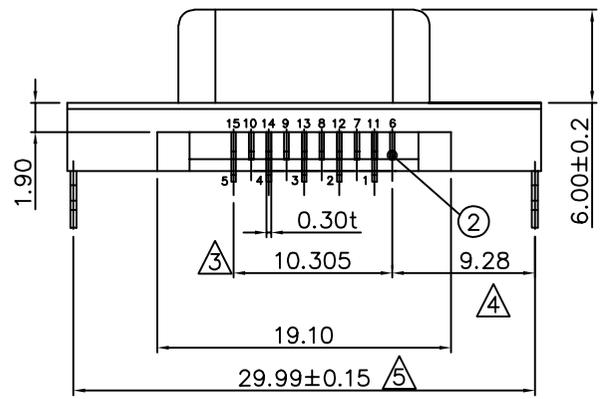

EAST-SLIM15X010-XXX

- 001 灰色铁壳镀镍
- 003 蓝色铁壳镀镍
- 005: 黑色铁壳镀镍
- 螺丝:
- 0: 锁螺丝
- 1: 无螺丝
- 2: 附螺丝

NOTE:  
 1.MARKED(1~9) SHOULD BE MEASURED BY FAI

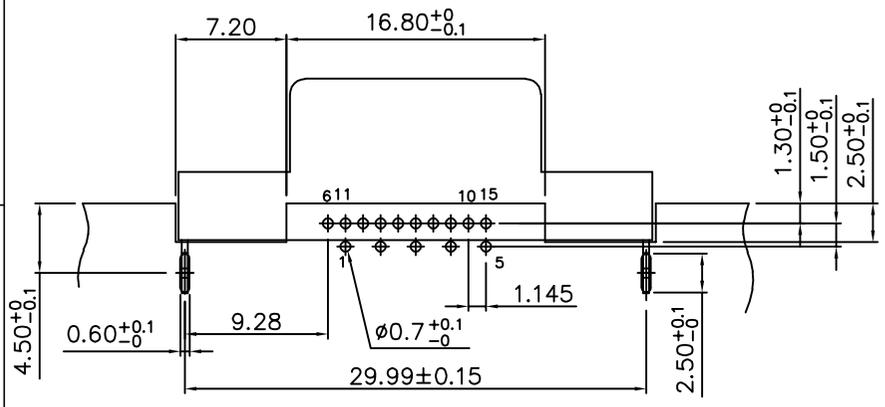

5	RIVET	NICKEL PLATED	
4	SHELL	NICKEL PLATED	
3	FORK	TIN PLATED	
2	TERMINAL	COPPER ALLOY	GOLD FLASH
1	HOUSING	HIGH TEMP PLASTIC BLACK	UL94V-0
NO.	PART NAME	DESCRIPTION	REMARK

TOLERANCES UNLESS OTHERWISE SPECIFIED: X. --- X.X ± 0.38 X.XX ± 0.25 X.XXX ± 0.10 Angle ±1°		COSTOMER COPY 深圳市东方御业科技有限公司 www.DFYCCNN.COM TEL:0755-27155560	TITAL: SLIM VGA 15P/F 正向CL=1.5mm 黑胶 (RoHS)
THESE DRAWING AND SPECIFICATION ARE THE PROPERTY OF Shenzhen Dongfangyue ELECTRONIC CO., LTD.. SHALL NOT BE REPRODUCED.	APPROVED: QINKAIXING 2017/09/10	PART NO: EAST-SLIM15X010-XXX	UNIT: mm SCALE: N/A SHEEL: 1:1 REV.