


REV.	ECN NO.	MODIFY MATTER	DATE	APPROVED
A		RELEASE TO PRODUCTION		

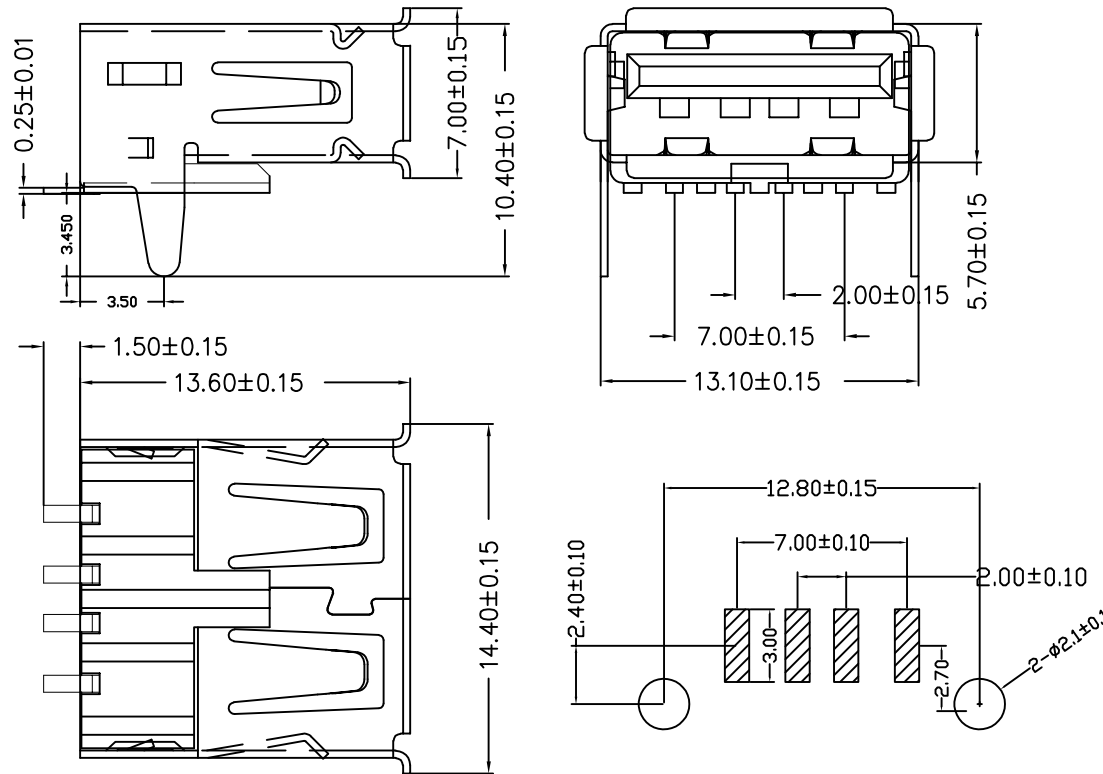

PCB LAYOUT

备注：侧弹分为外弹与内弹

EAST-904-131A202XS10X

- 1: 铁壳
- 2: 铜壳
- B: Black
- W: White

NOTES:

Housing: Thermoplastics  
 Contact: Copper Alloy  
 Shell: Copper Alloy/Steel  
 Voltage Current Rating: 1.5 AMP. 30V AC  
 Insulation Resistance: 1000MΩ Min.  
 Contact Resistance: 30 MΩ Max.  
 Dielectric Withstanding Voltage: 500V AC  
 Temperature Range: -35°C to +85°C  
 Insulator color: Black/White  
 Plastic material: PBT/LCP/Others  
 Shell finish: Nickel plated/Tin-Lead plated  
 Mechanical:  
 Mating Force: 3.5KG MAX  
 Unmating Force: 0.7 KG MIN.  
 Contact finish:

- 01: Selective Gold Flash
- 02: Selective Gold 3U"
- 03: Selective Gold 5U"
- 04: Selective Gold 15U"
- 05: Selective Gold 30U"

TOLERANCES UNLESS OTHERWISE SPECIFIED: X. --- X.X ± 0.38 X.XX ± 0.25 X.XXX ± 0.10 Angle ±1°	COSTOMER COPY	深圳市东方御业科技有限公司 WWW.DFYCCONN.COM TEL:0755-27155560		
	DRAWN: CHENLEI	2017/09/10	TITIAL:	
	CHECKED: CHENLEI	2017/09/10	PART NO:	
THESE DRAWING AND SPECIFICATION ARE THE PROPERTY OF Shenzhen Dongfangyue ELECTRONIC CO., LTD.. SHALL NOT BE REPRODUCED.	APPROVED: QINKAIXING	2017/09/10	UNIT: mm	SCALE: N/A
			SHEEL: 1:1	REV.