
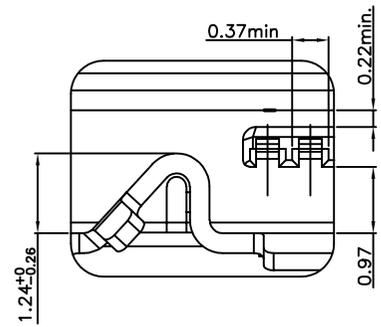





REV.	ECN NO.	MODIFY MATTER	DATE	APPROVED
A		RELEASE TO PRODUCTION		

Notes:

- 1) Material:
 Insulator : Thermoplastic G.F. UL94V-0
 Contacts : Copper Alloy
 Shell : Metal
- 2) Environmental :
 -55°C to +105°C
- 3) Finish
 Shell : 50u"min. Solderable Ni
 Contacts : 1~30u" min. Gold on mating area.
 100u" min. Tin on the tails.

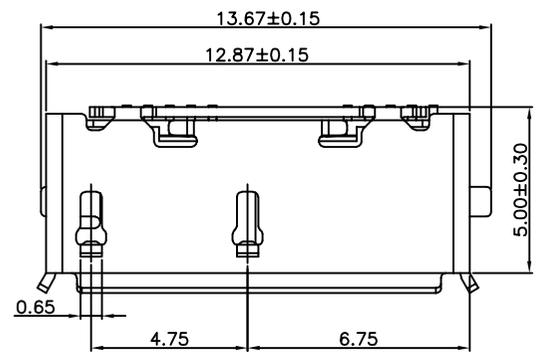



Detail C(2:1)

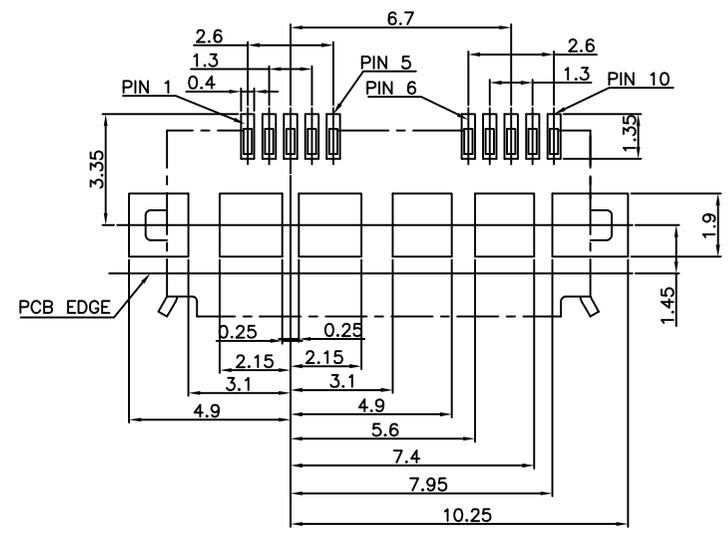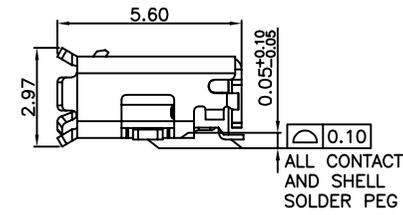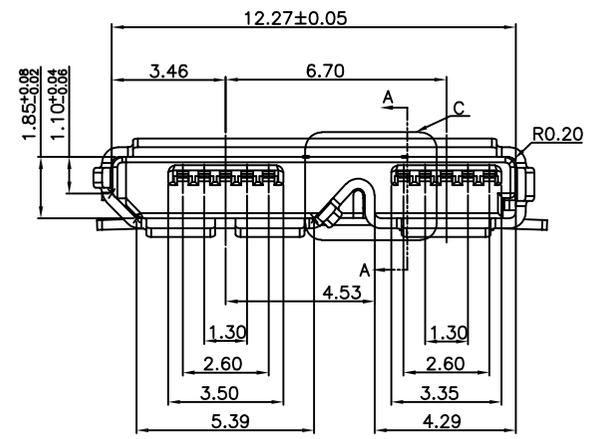

RECOMMENDED P.C.B LAYOUT

EAST-MICUSB3S11-1BBER

BK: 黑色
BE: 蓝色

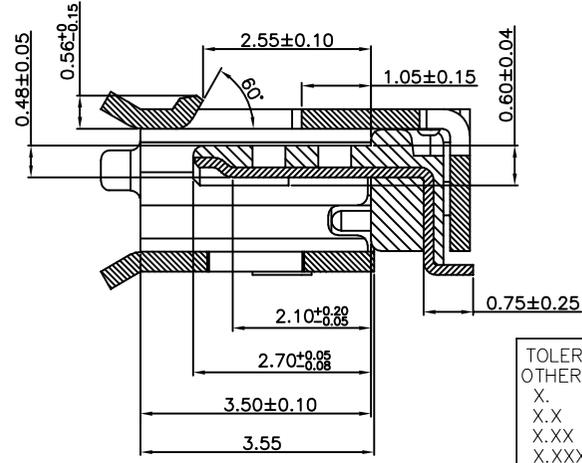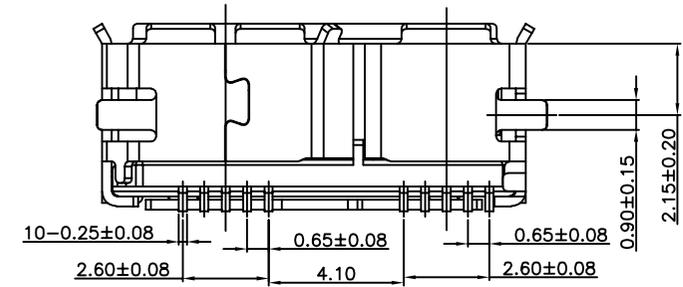

SECTION "A-A"(2:1)

TOLERANCES UNLESS OTHERWISE SPECIFIED:

X	---
X.X	± 0.38
X.XX	± 0.25
X.XXX	± 0.10
Angle	±1°

CUSTOMER COPY

深圳市东方御业科技有限公司
WWW.DFYCONN.COM TEL:0755-27155560

DRAWN: CHENLEI

2017/09/10

TITL: MICRO USB 3.0 SMT

CHECKED: CHENLEI

2017/09/10

PART NO: EAST-MICUSB3S11-1BBER (RoHS)

APPROVED: QINKAIXING

2017/09/10

UNIT: mm, SCALE: N/A, SHEEL: 1:1, REV.

THESE DRAWING AND SPECIFICATION ARE THE PROPERTY OF Shenzhen Dongfangyue ELECTRONIC CO., LTD.. SHALL NOT BE REPRODUCED.