


REV.	ECN NO.	MODIFY MATTER	DATE	APPROVED
A		RELEASE TO PRODUCTION		

NOTE:



- Material:
 - Housing: Thermoplastics, UL94V-0 (ROHS, HF)
 - Contact: Phosphor Bronze C5191-EH/C2680-EH, T=0.25mm
 - Shell: COPPER ALLOY T=0.30mm
- FINISH:
 - Contact: 15u" Gold Plated on Contact Area, 80u" Min. Tin Plated on Solder Area, 50u" Min. Nickel Underplating Over All.
 - Shell: 50u" Min. Nickel Underplating Over All.
- Specification:
 - 3.1: Rating:
 - Rated voltage 500V AC/DC. Rated current: 2 A Max.
 - 3.2: Electrical:
 - Insulation Resistance(EIA-364-21): 1000MΩ Min. at 500V/DC for 1Minute.
 - Contact Resistance(EIA-364-23): 30 mΩ Max. at 20mV Max. 50mA
 - Dielectric Withstanding Voltage(EIA-364-20): No discharge, flashover or breakdown at 500V/AC 1Minute
 - 4. Plug extraction force shall be between 1.0kgf and 2.00kgf

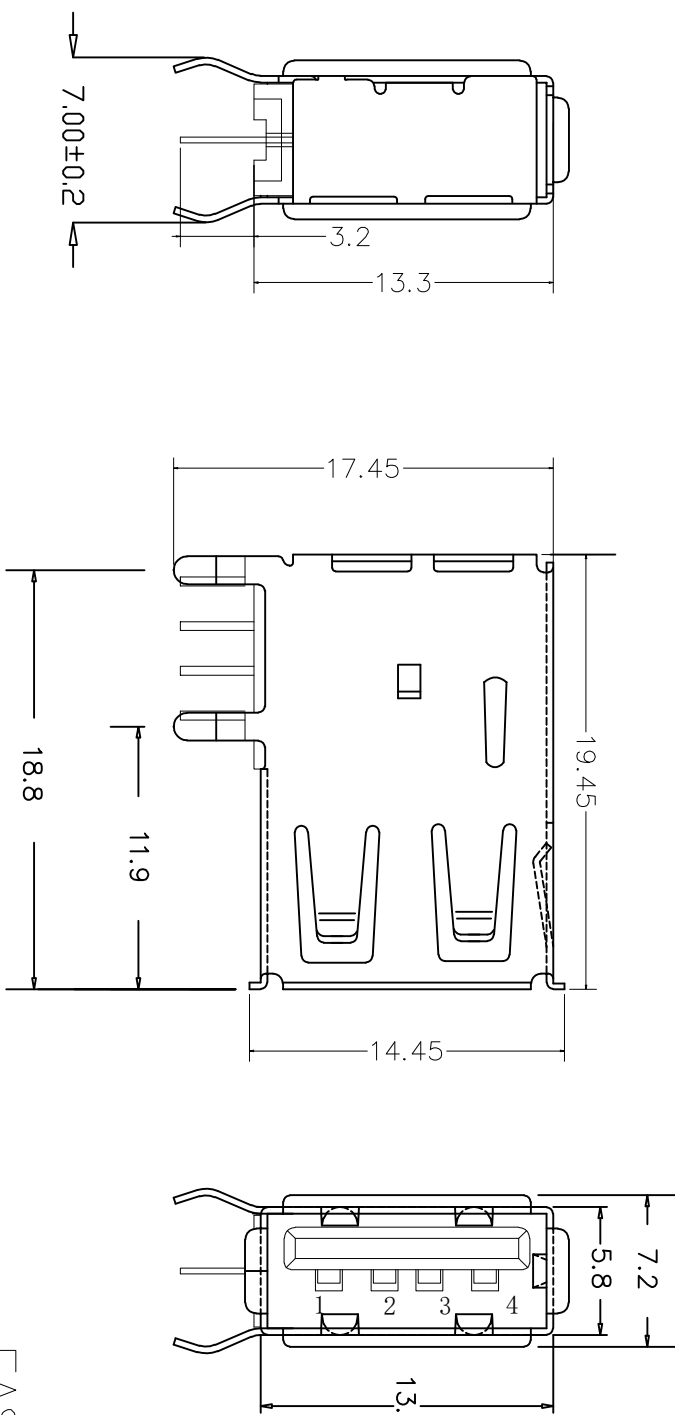

EAST-USB2A1XOPX1R

- 1: 铁壳镀镍
- 5: 铜壳镀镍

- 1: 吸塑盒
- B: 黑色
- W: 白色
- P: PBT
- L: LCP

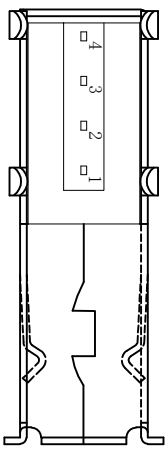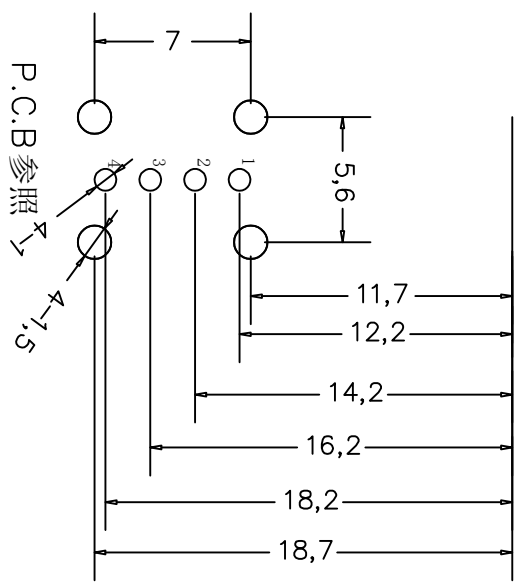

TOLERANCES UNLESS OTHERWISE SPECIFIED:		DRAWN: CHENLEI		CHECKED: CHENLEI		APPROVED: QINKAXING	
X	± 0.38	CUSTOMER COPY		DATE: 2017/09/10		PART NO: EAST-USB2A1XOPX1R	
X	± 0.25	DRAWING AND SPECIFICATION ARE THE PROPERTY OF Shenzhen Dongfangyue ELECTRONIC CO., LTD. SHALL NOT BE REPRODUCED.		DATE: 2017/09/10		UNIT: mm	
X	± 0.10	DRAWING AND SPECIFICATION ARE THE PROPERTY OF Shenzhen Dongfangyue ELECTRONIC CO., LTD. SHALL NOT BE REPRODUCED.		DATE: 2017/09/10		SCALE: N/A	
Angle	±1°	DRAWING AND SPECIFICATION ARE THE PROPERTY OF Shenzhen Dongfangyue ELECTRONIC CO., LTD. SHALL NOT BE REPRODUCED.		DATE: 2017/09/10		SHEET: 1-1	

深圳市东方御业科技有限公司
W.W.DF.YYCDNN.CDM TEL:0755-27155560

USB A/F 侧立长体有卷边

EAST-USB2A1XOPX1R

UNIT: mm SCALE: N/A SHEET: 1-1 REV.