
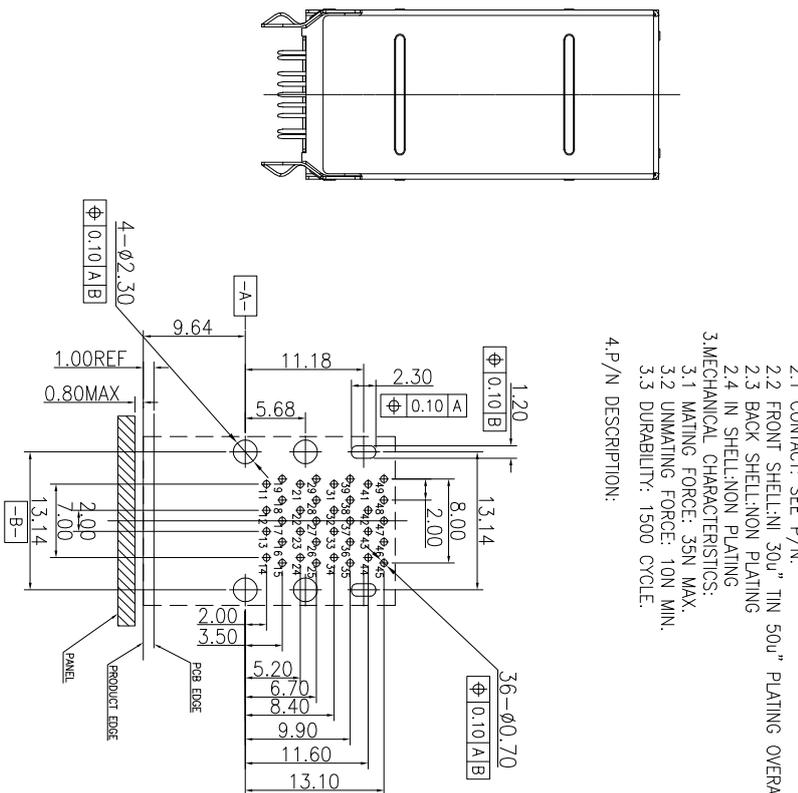


EAST-USB3D44S-1BBER

- D: DIP
- S: SMT
- S: 不锈钢
- C: 铜壳镀镍
- I: 半金 1u"
- 8: 半金 15u"
- BK: 黑色
- BE: 蓝色 300C
- P: PA66
- B: PBT
- L: LCP


- NOTES:
- MATERIAL:
 - 1.1 BOTTOM OF THE PLASTIC: PA66+30%GF, UL 94V-0,COLOR:BLUE 300C;
 - THE THIRD LAYER OF PLASTIC : BLUE 300C;
 - THE FOURTH LAYER OF PLASTIC : BLUE 300C;
 - 1.2 SPGER:LCP UL 94V-0,COLOR:BLACK
 - 1.3 CONTACT: BRASS C2680 (T=0.20mm)
 - 1.4 FRONT SHELL:SUS304 (T=0.25mm)
 - 1.5 BACK SHELL:SUS304 (T=0.25mm)
 - 1.6 IN SHELL:SUS304 (T=0.30mm)
 - FINISH:
 - 2.1 CONTACT: SEE P/N/
 - 2.2 FRONT SHELL:NI 30u" TIN 50u" PLATING OVERALL.
 - 2.3 BACK SHELL:NON PLATING
 - 2.4 IN SHELL:NON PLATING
 - MECHANICAL CHARACTERISTICS:
 - 3.1 MATING FORCE: 35N MAX.
 - 3.2 UNMATING FORCE: 10N MIN.
 - 3.3 DURABILITY: 1500 CYCLE.
 - P/N DESCRIPTION:

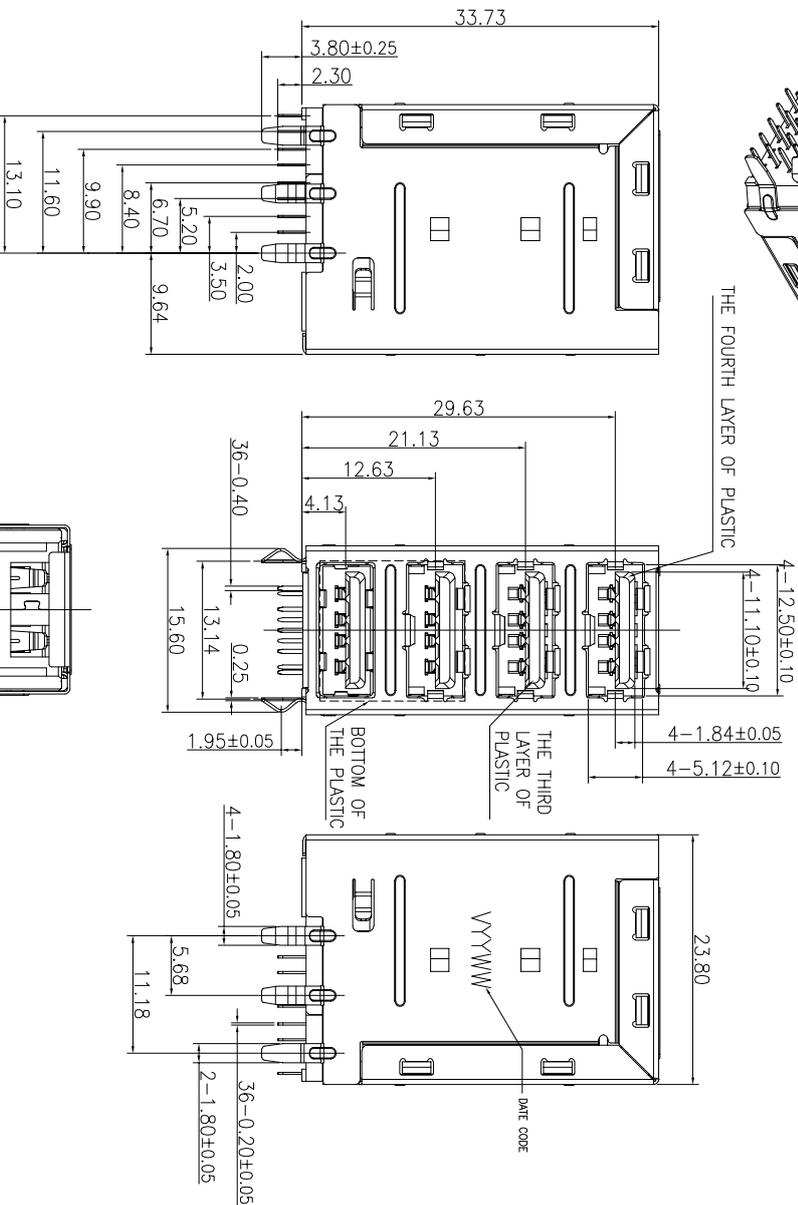

RECOMMENDED PCB LAYOUT(TOP VIEW)
TOL:±0.05
(FOR REFERENCE 1.0MM)

USB3.0 Pin Assignments

Pin Number	41	42	43	44	45	46	47	48	49
Pin Number	31	32	33	34	35	36	37	38	39
Pin Number	21	22	23	24	25	26	27	28	29
Signal Name (BUS)	D-	D+	GN0		15	16	17	18	19
Remark	USB2.0 Center Pin	STDA_SSRX-	STDA_SSRX+	GN0	DRAIN	STDA_SSTX-	STDA_SSTX+		



TOLERANCES UNLESS OTHERWISE SPECIFIED:

X	± 0.38
X.X	± 0.25
X.XX	± 0.10
X.XXX	± 1°
Angle	± 1°

THESE DRAWING AND SPECIFICATION ARE THE PROPERTY OF Shenzhen Dongfangyao Electronic Co., Ltd. SHALL NOT BE REPRODUCED.

CUSTOMER	深圳东方御业科技有限公司
COPY	W.W.DF.YYCDNN.COM TEL:0755-27155560
DRAWN:	CHENLEI
CHECKED:	CHENLEI
APPROVED:	QINKAIXING
PART NO:	EAST-USB3D44S-1BBER
UNIT:	mm
SCALE:	N/A
SHEET:	1/1
REV:	