

REV.	ECN NO.	MODIFY MATTER	DATE	APPROVED
A		RELEASE TO PRODUCTION		

1. MATERIAL&PLATING:






- 1.1 INSULATOR: SEE ORDER INFORMATION, UL94V-0
- INSULATOR COLOR: SEE ORDER INFORMATION.
- 1.2 CONTACT: BRASS, GOLD FLASH PLATED IN CONTACT AREA, 80U MIN TIN PLATED IN SOLDER AREA, 30U MIN NICKEL UNDERPLATED OVERALL.
- 1.3 SHELL: SPCC, NICKEL PLATED OVERALL
- 1.4 BOARD LOCK: SPCC, TIN PLATED OVER NICKEL UNDERPLATED OVERALL.
- 1.5 REVIET: BRASS, 30U MIN NICKEL PLATED OVERALL.
- 1.6 SCREW: STEEL, NICKEL PLATED OVERALL.

2. SPECIFICATION:

- 2.2 CURRENT RATING: 1.0A.
- 2.3 CONTACT RESISTANCE: 25mΩ MAX.
- 2.4 INSULATION RESISTANCE: 1000MΩ MIN.
- 2.5 DIELECTRIC WITHSTANDING VOLTAGE: 500V PER MINUTE.
- 2.6 OPERATING TEMPERATURE: -20°C~+85°C

3. NOTES:

- 3.1 ALL COMPONENTS ARE RoHS COMPLIANT.
- 3.2 RESISTANCE TO SOLDERING HEAT: 265°C FOR 5 SECONDS, AND ONLY FOR WAVE SOLDERING PROCESS.
- 3.3 ORDER INFORMATION:

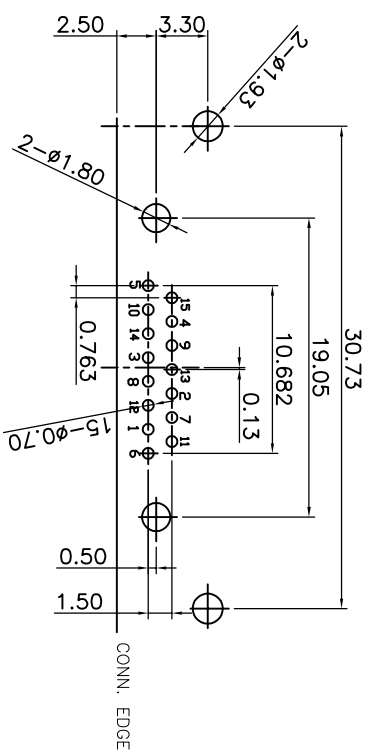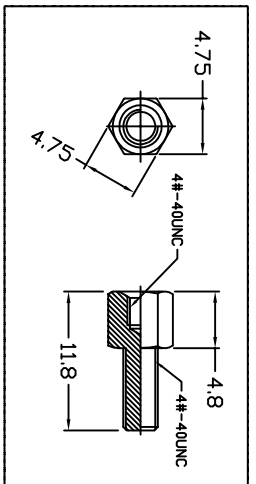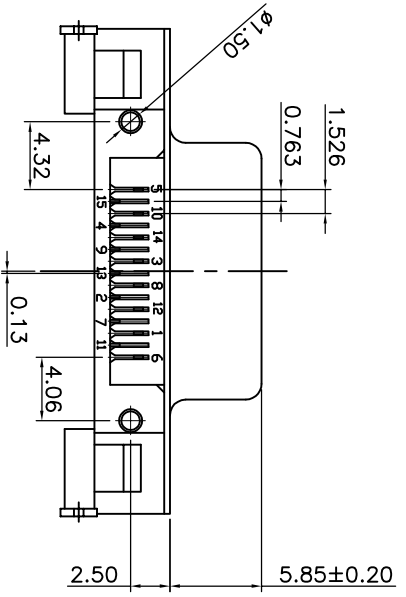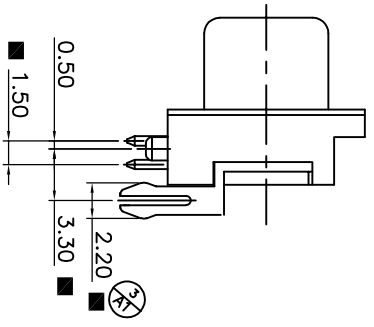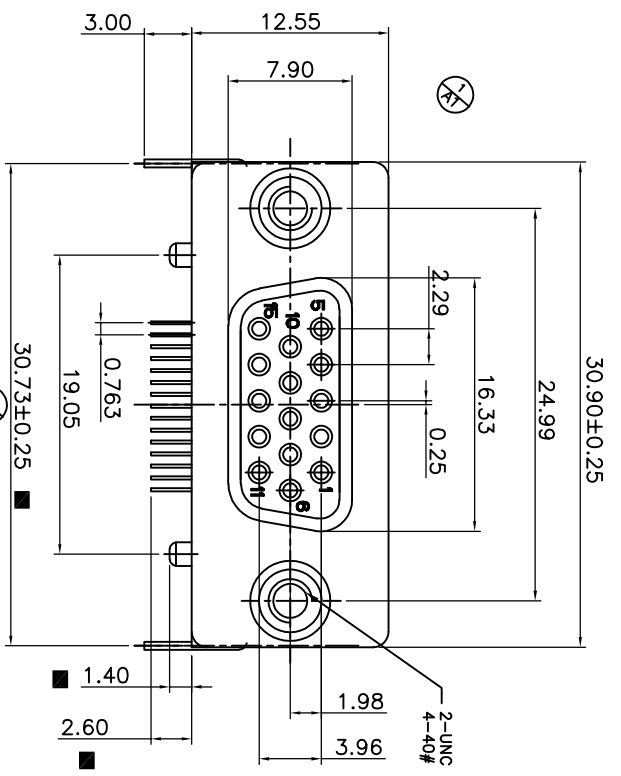

RECOMMENDED P.C.B LAYOUT(PCB THICKNESS: 1.6mm)
COMPONENT SIDE VIEW(TOLERANCE: ±0.05)

- EAST-SLIM15X050-XXX
- 螺丝:
- 0: 锁螺丝 4.8*11.8
 - 1: 无螺丝
 - 2: 附螺丝
 - 4: 锁螺丝 5.8*11.8
 - 5: 锁螺丝 4.8*9.8
 - 6: 锁螺丝 5.8*9.8
- 颜色:
- 003: 蓝色
 - 005: 黑色

TOLERANCES UNLESS OTHERWISE SPECIFIED:	±	0.38
X.X	±	0.25
X.XXX	±	0.10
Angle		±1°

TOLERANCES UNLESS OTHERWISE SPECIFIED:		DRAWN: CHENLEI		CHECKED: CHENLEI		APPROVED: QINXAXING	
CUSTOMER COPY		2017/09/10		2017/09/10		2017/09/10	
TITIAL: 深圳市东方御业科技有限公司		PART NO: SLIM2.0 VGA 1SPIN R/A DIP, 前8后7		UNIT: mm		SCALE: N/A	
WWW.DFYCCNN.COM TEL:0755-27155560		EAST-SLIM15X050-XXX		SHEET: 1-1		REV:	

8 7 6 5 4 3 2 1