REV.	ECN NO.	MODIFY MATTER	DATE	APPROVED
A		RELEASE TO PRODUCTION		

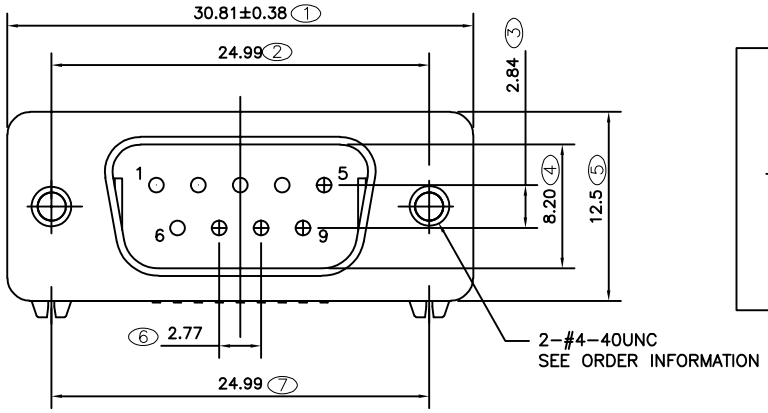

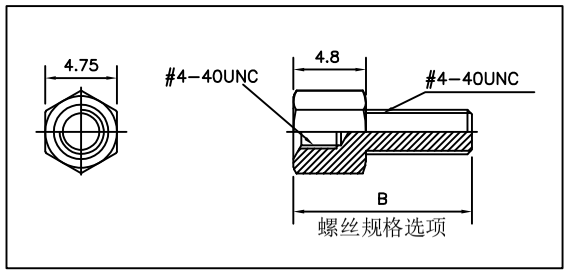

1. MATERIAL&PLATING:
   1.1 INSULATOR: SEE TABLE, UL94V-0
   INSULATOR COLOR: SEE TABLE.
   1.2 CONTACT: COPPER ALLOY, T: 0.25mm,
   GOLD FLASH PLATED IN CONTACT AREA,
   60u" MIN MATTE TIN PLATED IN SOLDER AREA,
   30u" MIN. NICKEL UNDERPLATED OVERALL.
   1.3 SHELL: SPCC, T:0.35mm, NICKEL PLATED OVERALL.
   1.4 BOARD LOCK: SPCC, T:0.5mm, TIN PLATED.
   1.5 RIVET: COPPER ALLOY, NICKEL PLATED OVERALL.
   1.6 SCREW: STEEL, NICKEL PLATED OVERALL.
2. SPECIFICATION:
   2.1 CURRENT RATING: 2.0 Amps.
   2.2 CONTACT RESISTANCE: 30mΩ MAX.
   2.3 INSULATION RESISTANCE: 1000MΩ Min./DC 500V.
   2.4 DIELECTRIC WITHSTANDING VOLTAGE: AC500V PER MINUTE.
3. NOTES:
   3.1 ALL COMPONENTS ARE RoHS COMPLIANT.
   3.2 RESISTANCE TO SOLDERING HEAT: 260°C FOR 5 SECONDS,
   AND ONLY FOR WAVE SOLDERING PROCESS.

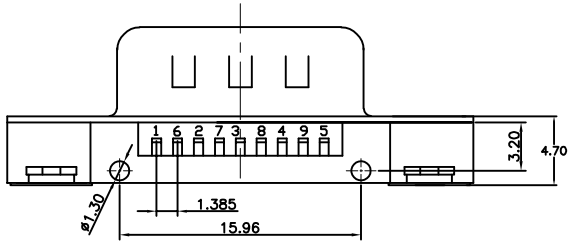

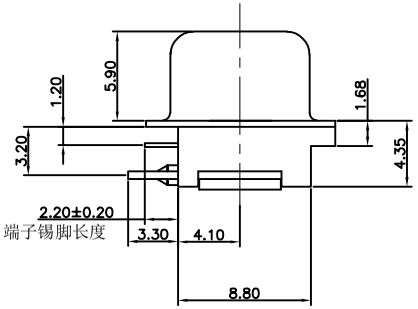

EAST-SLIM090030-005

螺丝：
0:锁螺丝4.8*9.6
1:无螺丝
2:附螺丝4.8*11.8
3:附螺丝5.8*12.8
4:锁螺丝5.8*12.8
5:锁螺丝4.8*11.8
6:锁螺丝5.8*9.8

颜色：
001:绿色
003:蓝色
005:黑色

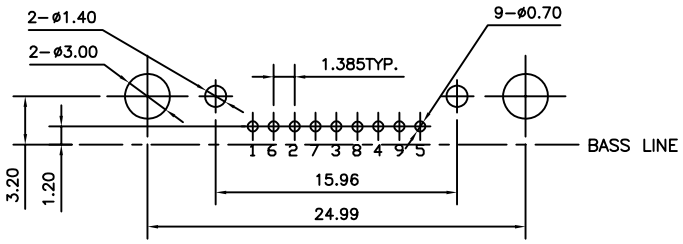

RECOMMENDED P.C.B LAYOUT(PCB THICKNESS: 1.6mm)
COMPONENT SIDE VIEW(TOLERANCE: ±0.05)

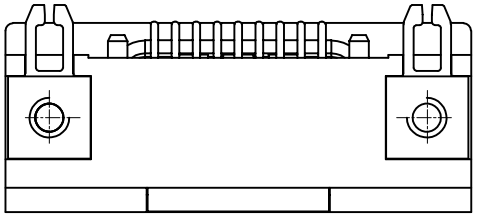

TOLERANCES UNLESS OTHERWISE SPECIFIED:		COSTOMER COPY	深圳市东方御业科技有限公司 WWW.DFYYCONN.COM TEL:0755-27155560		
X.	---				
X.X	± 0.38	DRAWN: CHENLEI	2017/09/10	TITAL: D-SUB 9PIN MALE DIP 沉板式 RoHS (RoHS)	
X.XX	± 0.25	CHECKED: CHENLEI	2017/09/10	PART NO: EAST-SLIM090030-005	
X.XXX	± 0.10				
Angle	±1°	APPROVED: QINKAIXING	2017/09/10	UNIT: mm	SCALE: N/A / SHEEL: 1:1 / REV.

THESE DRAWING AND SPCIFICATION ARE THE PROPERTY OF Shenzhen Dongfangyuye ELECTRONIC CO., LTD., SHALL NOT BE REPRODUCED.