
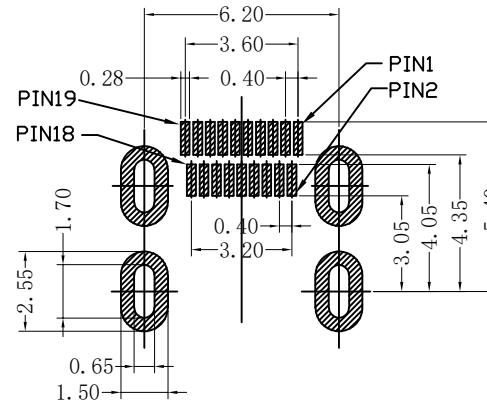
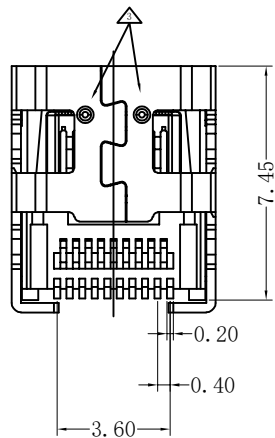
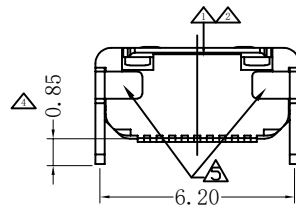
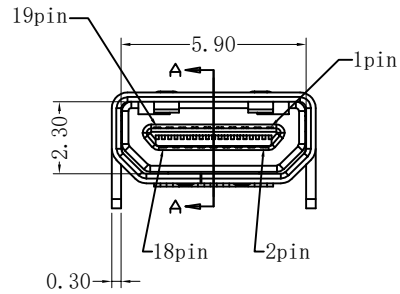
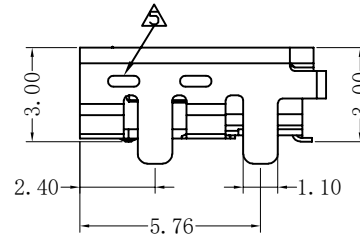


REV.	ECN NO.	MODIFY MATTER	DATE	APPROVED
A		RELEASE TO PRODUCTION		

NOTE:

- MATERIAL:
HOUSING: LCP WITH 30% GF, UL 94V-0, BLACK.
CONTACTS: PHOSPHOR BRONZE.
SHELL: C2680
- FINISHED
CONTACTS: 1U" GOLD PLATED OVER ALL,
30U" MIN. NICKEL UNDERPLATING
OVER ALL
SHIELD: 50U" MIN. NICKEL UNDERPLATING OVER ALL






RECOMMENDED PCB LAYOUT
(TOL:±0.05)

PIN	Signal Assignment	PIN	Signal Assignment
1	Hot Plug Detect	2	Utility
3	TMDS Data2+	4	TMDS Data2 Shield
5	TMDS Data2-	6	TMDS Data1+
7	TMDS Data1 Shield	8	TMDS Data1-
9	TMDS Data0+	10	TMDS Data0 Shield
11	TMDS Data0-	12	TMDS Clock+
13	TMDS Clock Shield	14	TMDS Clock-
15	CEC	16	DDC/CEC Ground
17	SCL	18	SDA
19	+5V Power		

TOLERANCES UNLESS OTHERWISE SPECIFIED: X. --- X.X ± 0.38 X.XX ± 0.25 X.XXX ± 0.10 Angle ±1°		COSTOMER COPY DRAWN: CHENLEI CHECKED: CHENLEI APPROVED: QINKAIXING		深圳市东方御业科技有限公司 WWW.DFYCONN.COM TEL:0755-27155560 TITL: HDMI (D-TYPE) A1 (加凸包) PART NO: EAST-HDD1904BA7 UNIT: mm		SCALE: N/A SHEEL: 1:1 REV.	
THESE DRAWING AND SPECIFICATION ARE THE PROPERTY OF Shenzhen Dongfangyue ELECTRONIC CO., LTD.. SHALL NOT BE REPRODUCED.							

REV.	ECN NO.	MODIFY MATTER	DATE	APPROVED
A		RELEASE TO PRODUCTION		

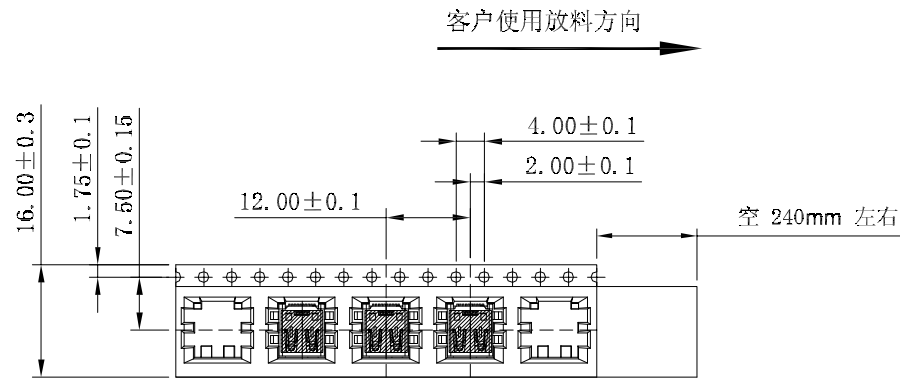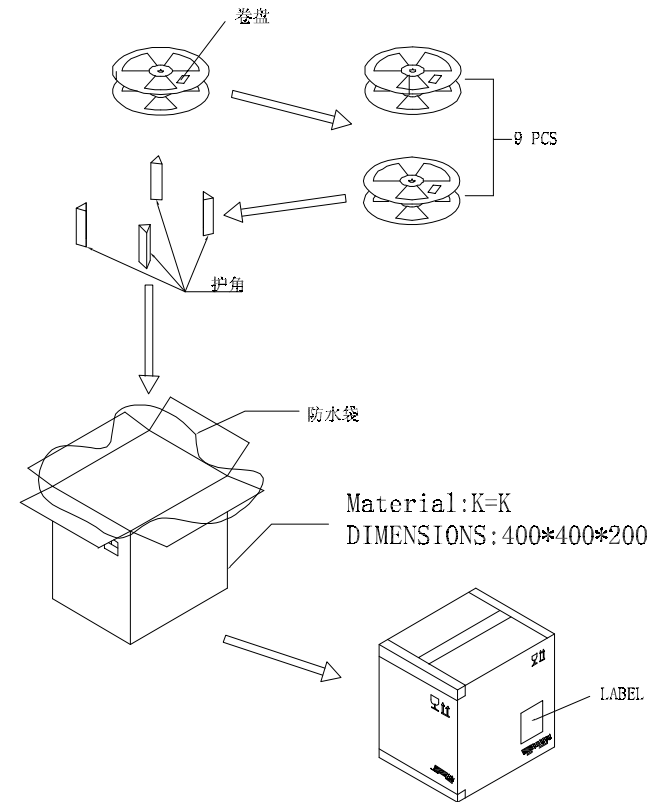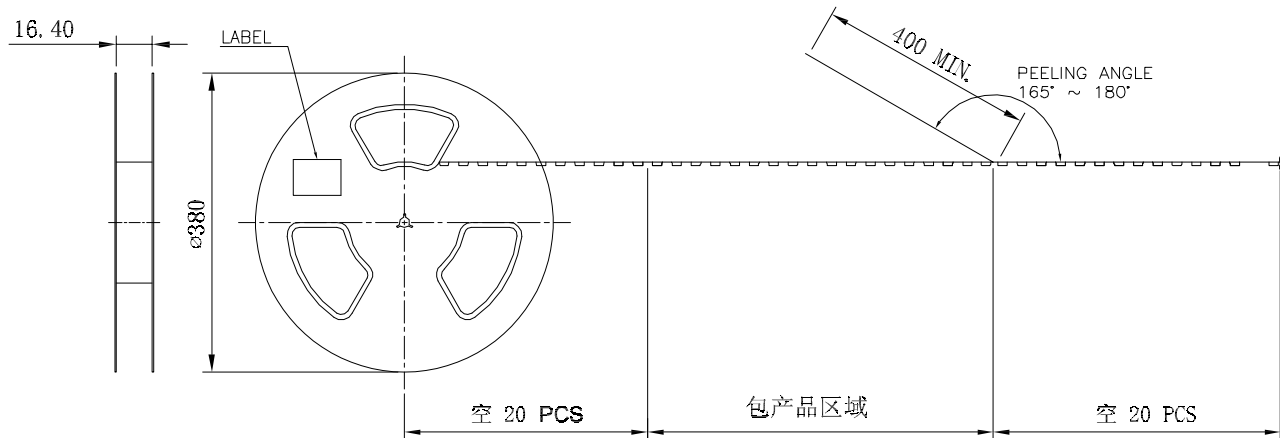

NOTE:

1. 材质:
 纸箱: K=K, 双层瓦轮.
 护角: B3B, 一箱四个.
 上带: PET透明色, 可承受高温 100° C.
 下带: PS黑色, 可承受高温 120° C.
 卷盘: PS蓝色, 可承受高温70° C.
 防水袋: PET透明色, 可承受高温 100° C.
2. 上带剥离力: 0.1 ~ 1.3 N (10 ~ 130 GRAMS)
3. 剥离速度: 300 mm/min.
4. 每箱干燥剂两包.

2200	9	19800
PCS/ TAPE	REELS/ BOX	QUANTITY

TOLERANCES UNLESS OTHERWISE SPECIFIED: X. --- X.X ± 0.38 X.XX ± 0.25 X.XXX ± 0.10 Angle ±1°		CUSTOMER COPY	深圳市东方御业科技有限公司 WWW.DFYCONN.COM TEL:0755-27155560	
DRAWN: CHENLEI		2017/09/10	TITLE: HDMI (D-TYPE) A1 (加凸包) (RoHS)	
CHECKED: CHENLEI		2017/09/10	PART NO: EAST-HDD1904BA7	
APPROVED: QINKAIXING		2017/09/10	UNIT: mm	SCALE: N/A
THESE DRAWING AND SPECIFICATION ARE THE PROPERTY OF Shenzhen Dongfangyuye ELECTRONIC CO., LTD.. SHALL NOT BE REPRODUCED.			SHEET: 1:1	REV.